

LNA Series

2.0 – 3.0GHz Low Noise Amplifier

Features

- Frequency Range: 2.0 – 3.0GHz
- Gain: 19dB
- P_{1dB}: +19.5dBm
- IP3: +33.5dBm
- Noise Figure: 0.9dB
- DC Power: 5V/95mA
- SMA Connector

Picture



Performance measured @ 2.5GHz







Description

LNA-2030 is a 0.9dB Noise Figure Low Noise Amplifier operates in wideband with frequency range from 2.0GHz to 3.0GHz.







Electrical Specifications @ +25 °C, Z_{in} = Z_{out} = 50 Ω, V_{cc} = 5V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2.0		3.0
Gain	f = 2.0GHz		21.5	
	f = 2.5GHz		19.0	
	f = 3.0GHz		16.0	
P _{1dB}	f = 2.0GHz		+15.0	
	f = 2.5GHz		+19.5	
	f = 3.0GHz		+20.5	
IP3	f = 2.0GHz		+27.5	
	f = 2.5GHz		+33.5	
	f = 3.0GHz		+35.0	
Noise Figure	dB		0.9	
Reverse Isolation	dB		-33	
VSWR	Input VSWR		1.7:1	
	Output VSWR		2.0:1	
DC Power Supply	V	3	5	5.5
Supply Current	mA		95	

Typical Performance @ +25 °C

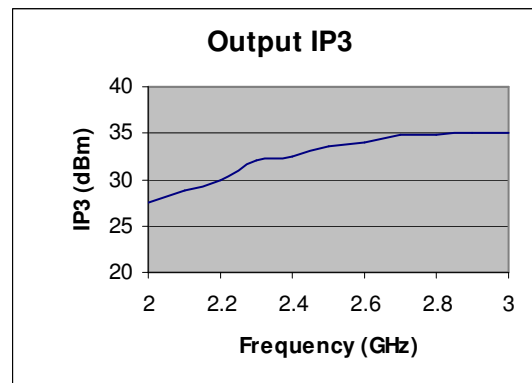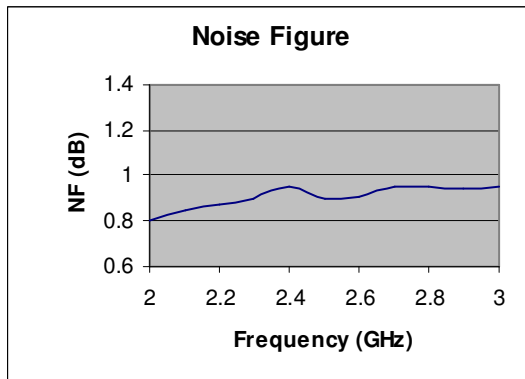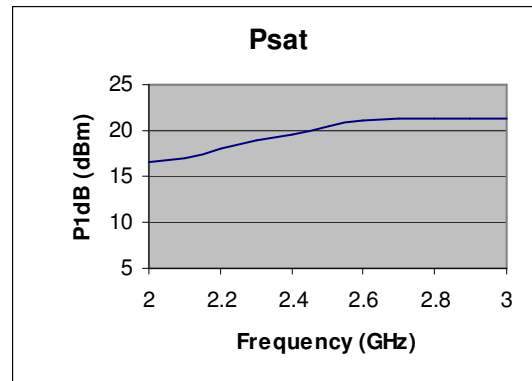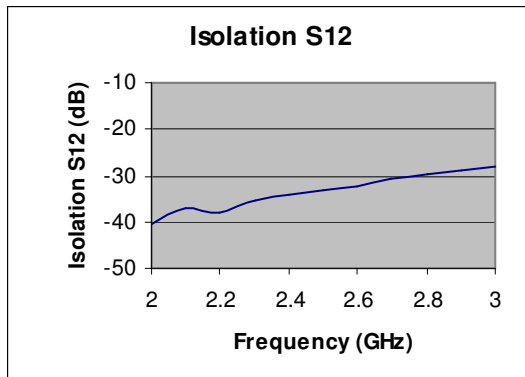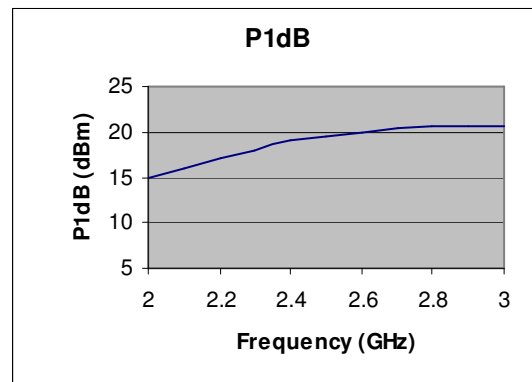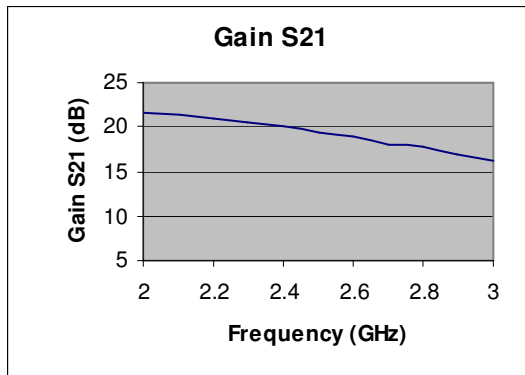


Typical Performance @ +25 °C

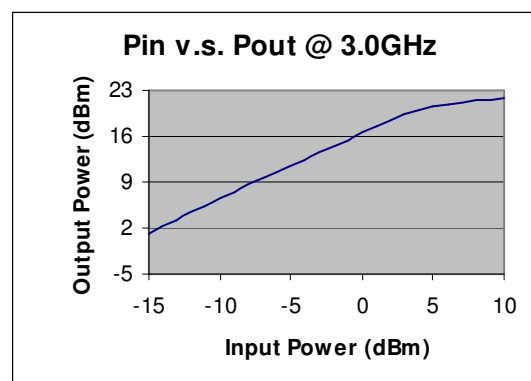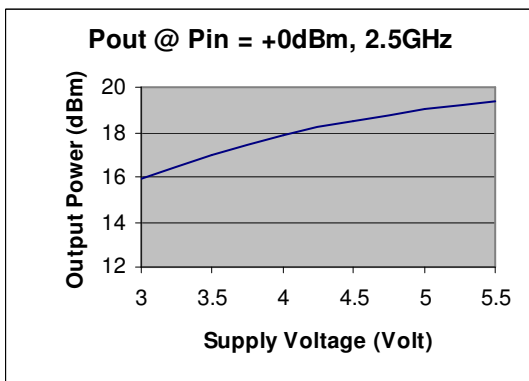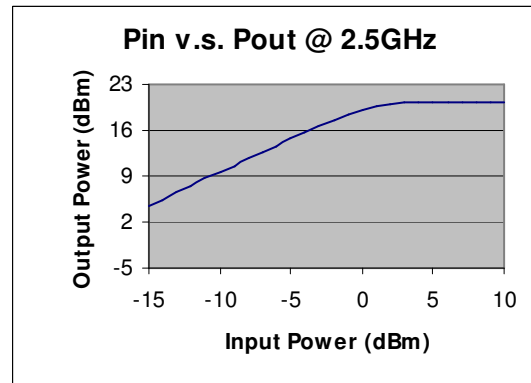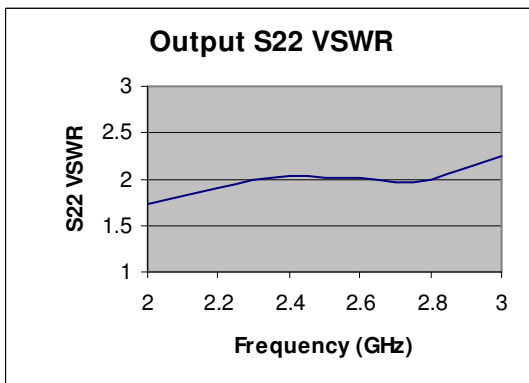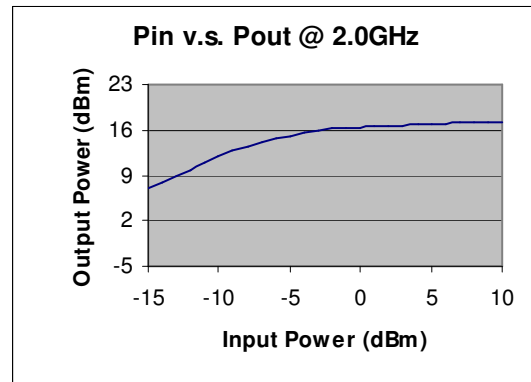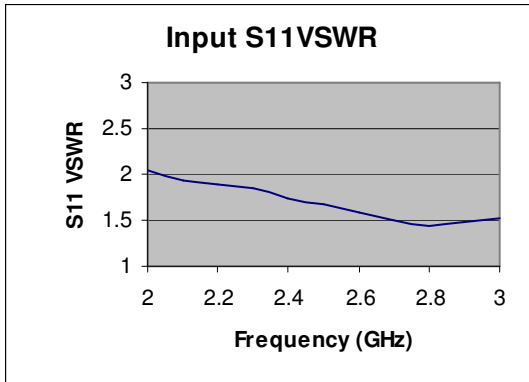

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

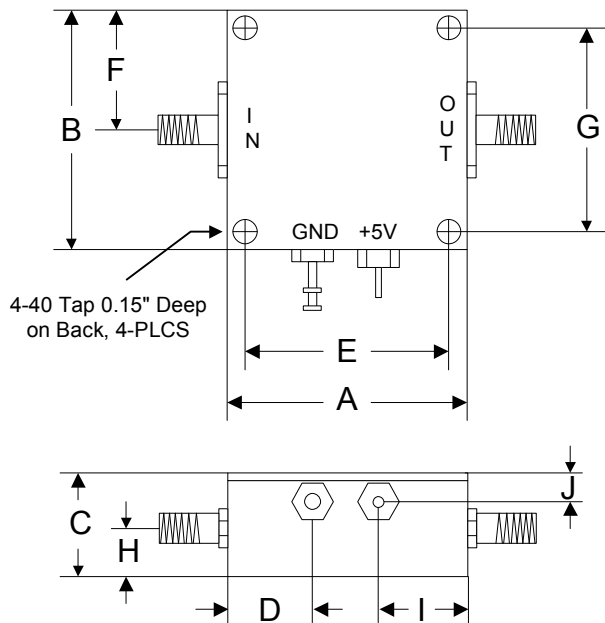

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76