


JPA Series

2-6GHz 15W RF Power Amplifier

Features

- Frequency Range: 2 - 6GHz
- Small Signal Gain: 43dB
- P_{SAT}: +42dBm (15W)
- DC Power: +32V @ 1100mA
- DC Power Reverse Protected
- RF Connector: SMA Female
- GaN RF Power Amplifier
- Class AB Power Amplifier

Picture

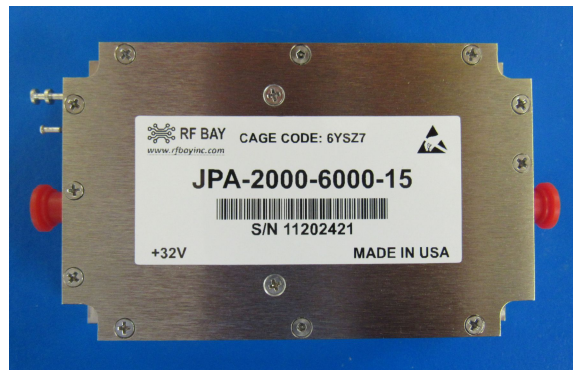


Electrical Specifications @+25°C, Z_{in}=Z_{out}=50 Ω, V_{supply} = +32VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2		6
Small Signal Gain (S ₂₁) (P _{IN} = -45dBm)	f = 2GHz	41	43	
	f = 4GHz	41	43	
	f = 6GHz	41	43	
Gain Flatness	dB		±1.5	±2.5
Output Power P _{3dB}	f = 2GHz		+38.5	
	f = 4GHz	+37.0	+38.5	
	f = 6GHz		+38.5	
Output Power P _{SAT}	f = 2GHz		+42.0	
	f = 4GHz	+41.0	+42.5	
	f = 6GHz		+42.0	
Output IP3	f = 4GHz		+46	
Efficiency P _{IN} = +5dBm, f = 4GHz	%		28	
Noise Figure	f = 4GHz		7.0	9.0
Reverse Isolation (S ₁₂)	dB	-40	-45	
VSWR-Input (S ₁₁)	f = 4GHz	ratio:1	1.2:1	1.5:1
DC Supply Voltage	V	28	32	33
DC Supply Current	No RF Input	mA	1100	1500
	P _{OUT} = +42dBm	mA	2300	2800


JPA Series

2-6GHz 15W RF Power Amplifier

Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

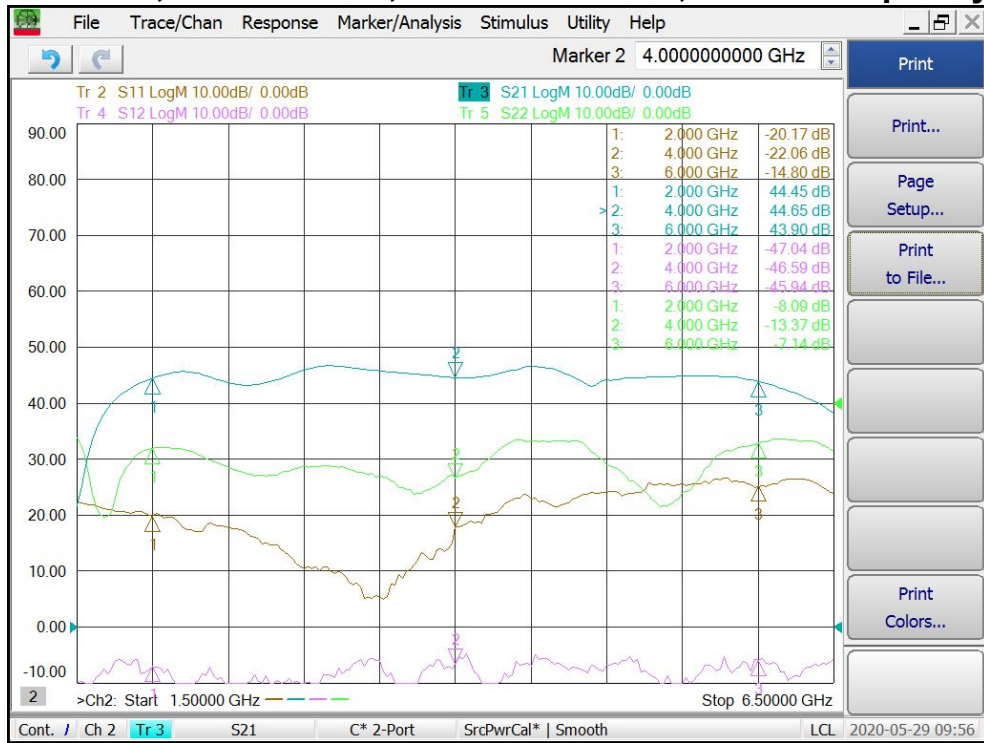


Noise Figure vs Frequency

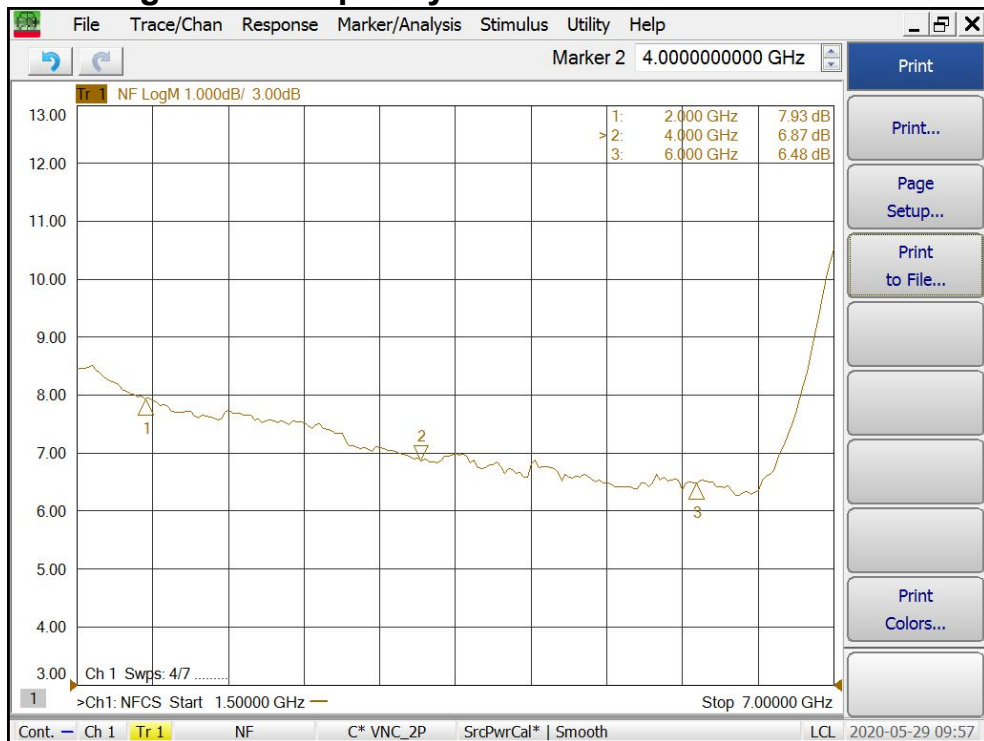


JPA Series

2-6GHz 15W RF Power Amplifier

Output Pout vs Frequency

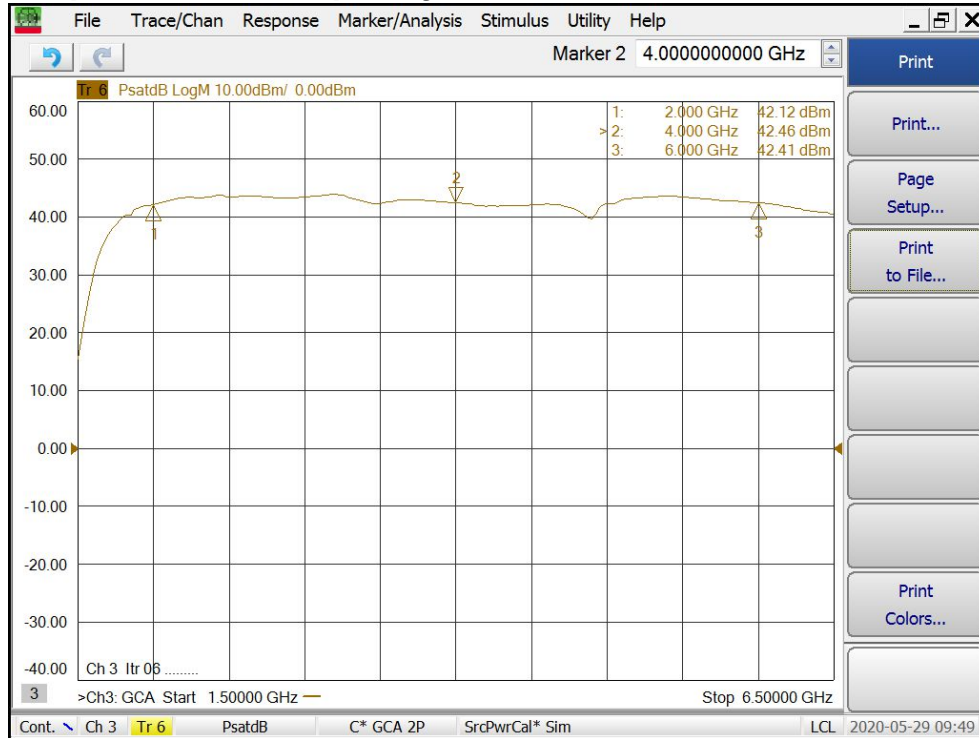







Output IP3 vs Frequency

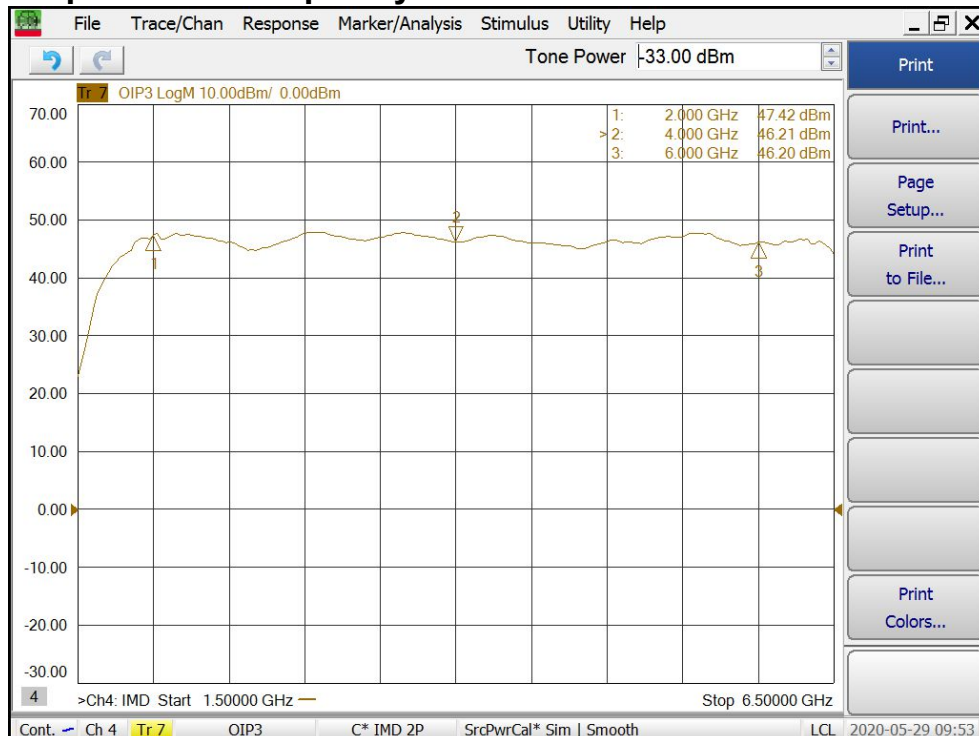

JPA Series

2-6GHz 15W RF Power Amplifier







Typical Performance @ +25°C

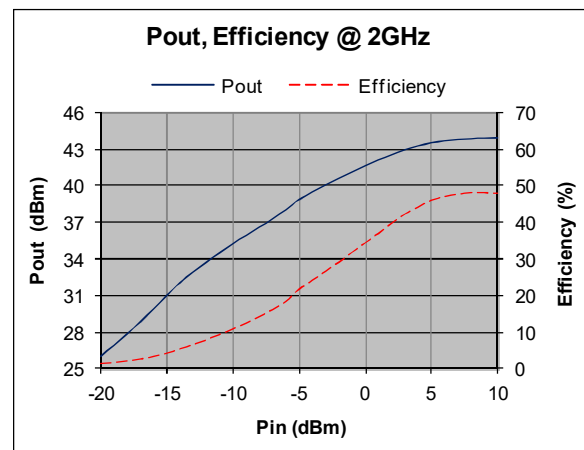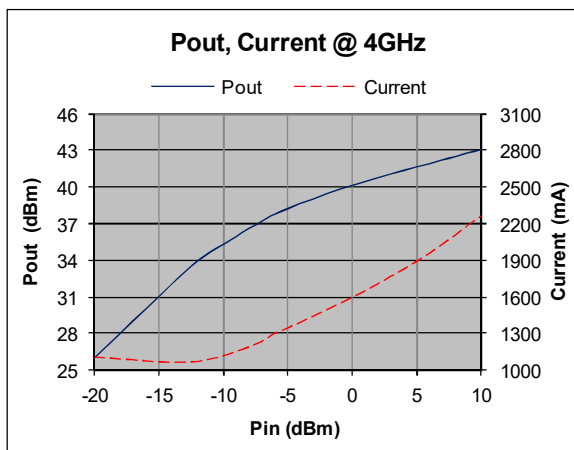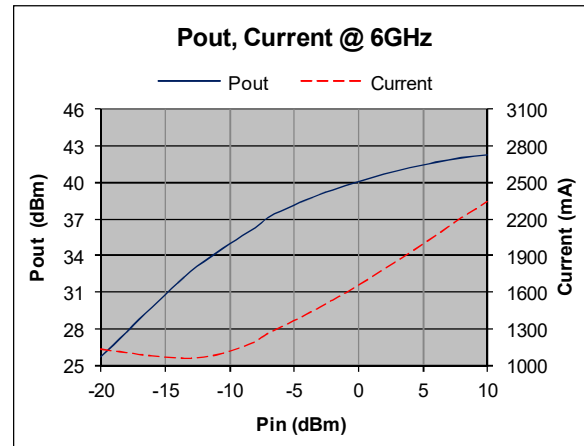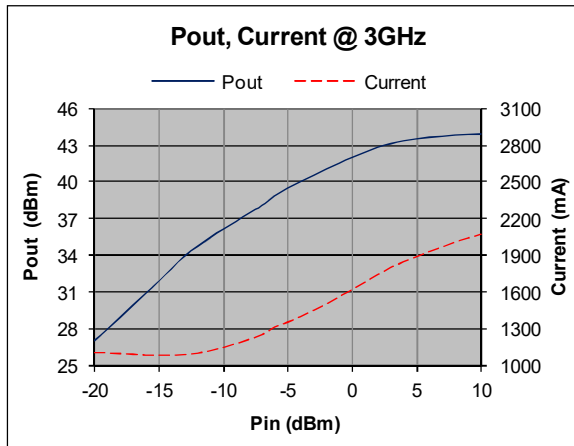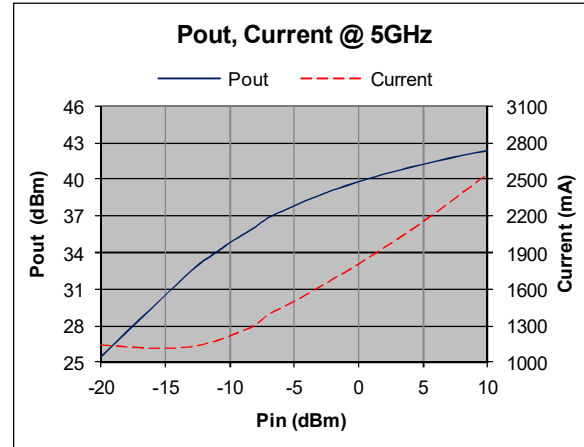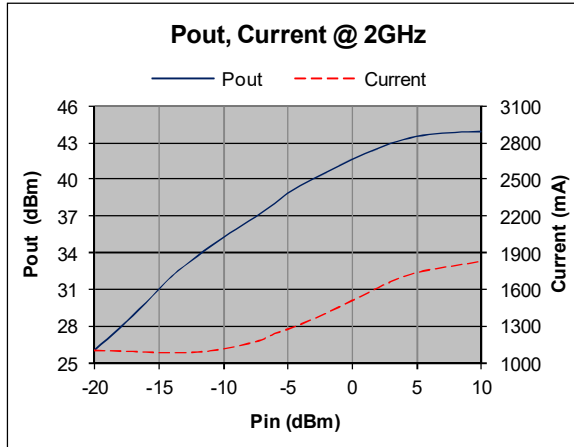

JPA Series

2-6GHz 15W RF Power Amplifier




Typical Performance @ +25°C

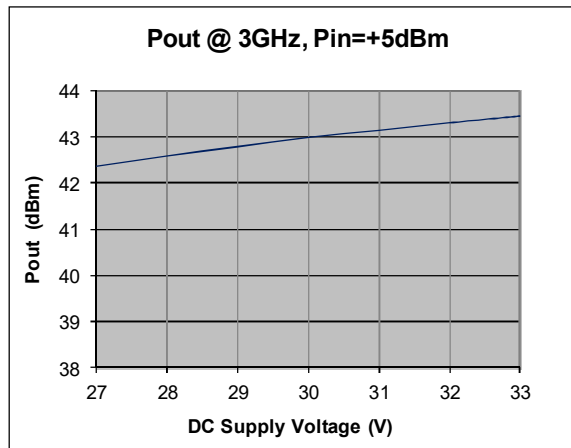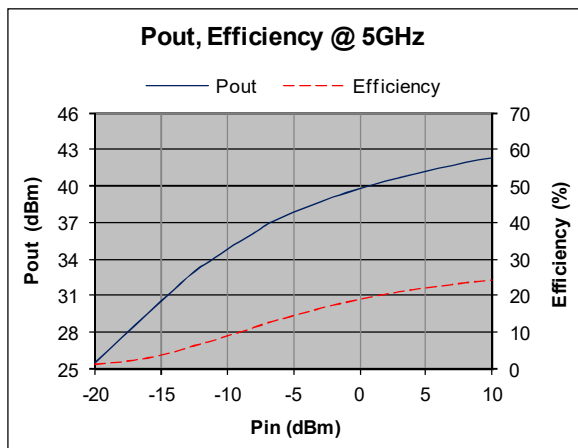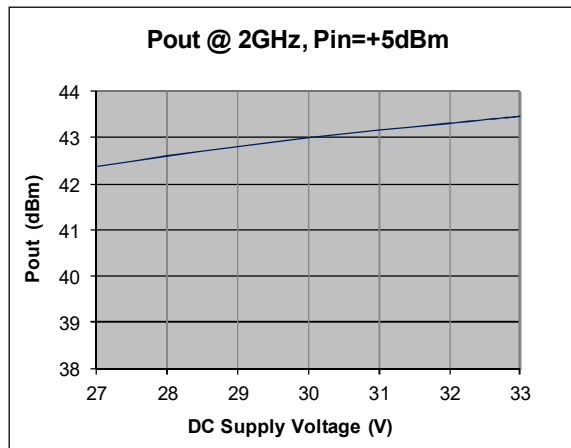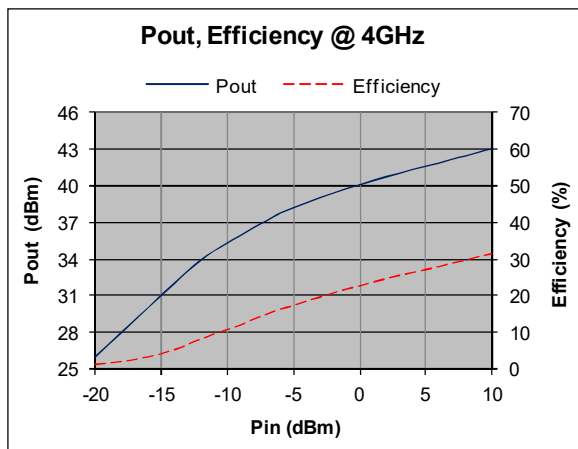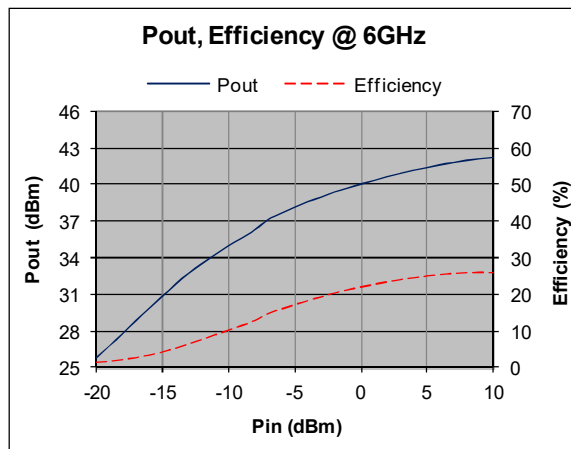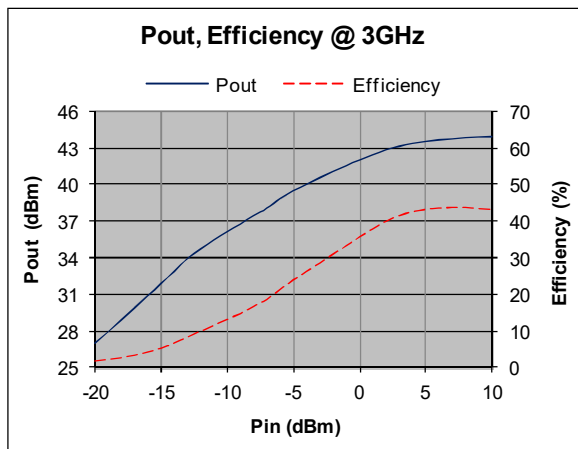

JPA Series

2-6GHz 15W RF Power Amplifier

Typical Performance @ +25°C

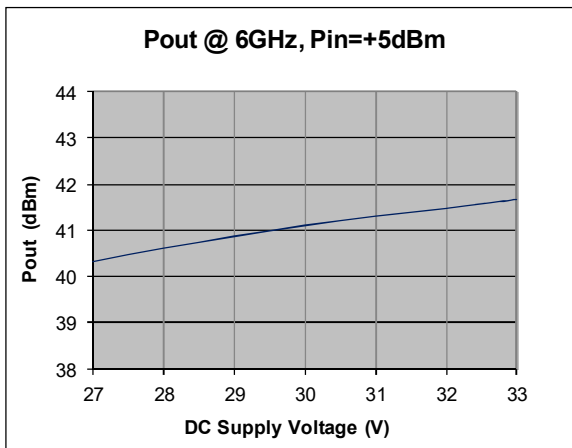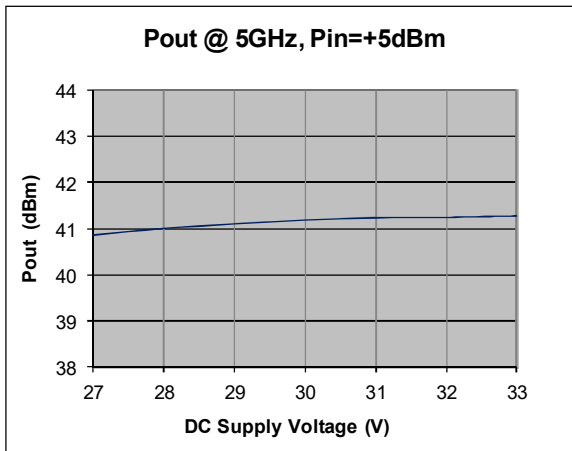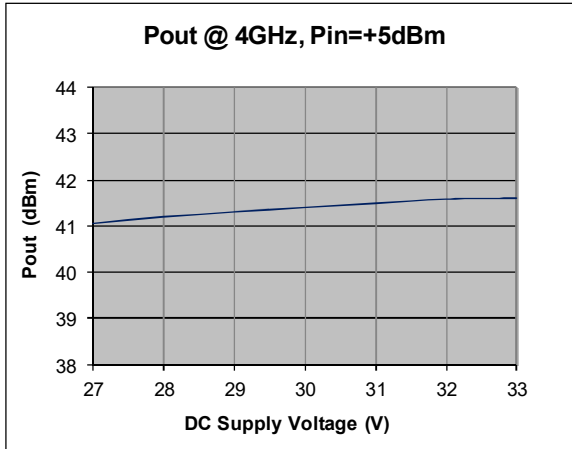

JPA Series

2-6GHz 15W RF Power Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage	+33V
RF Input Power	+15dBm
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-40 °C to +100 °C

ESD Sensitive Material




Warning and Caution:

- 1) Adequate heatsink must be used. Cooling Fan highly recommended. Amplifier operational baseplate temperature must be within datasheet operating temperature range.**
- 2) Load must be connected to amplifier output at all time if DC power is ON.**
- 3) If power amplifier connected to an antenna for signal transmission, it is strongly recommended to use a high power isolator or fixed attenuator between amplifier output and antenna input.**

JPA Series

2-6GHz 15W RF Power Amplifier

Outline

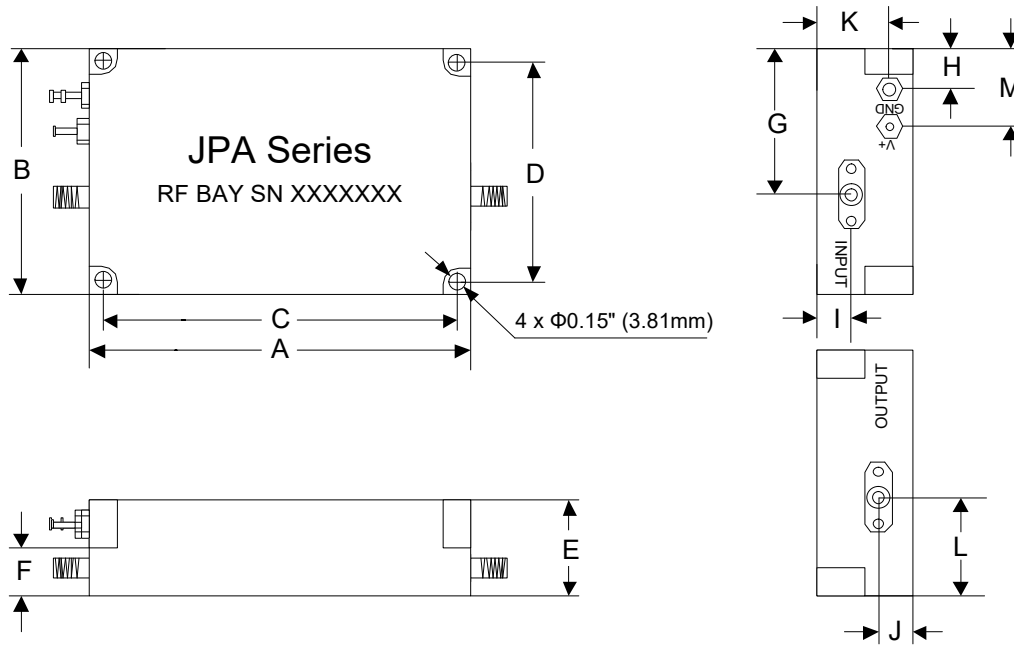

Mounting screws recommended to use hex socket head cap #6x3/4"

	A	B	C	D	E	F	G	H	I
Inch	4.00	2.50	3.70	2.20	1.05	0.54	1.40	0.30	0.30
mm	101.60	63.50	93.98	55.88	26.67	13.72	35.56	23.37	7.62
	J	K	L	M					
Inch	0.30	0.75	1.10	0.70					
mm	7.62	19.05	27.94	17.78					