

## LNA Series

## 20 – 4000MHz Low Noise Amplifier

### Features

- Frequency Range: 20 – 4000MHz
- Gain: 25dB
- P<sub>1dB</sub>: +18dBm
- IP3: +35dBm
- Noise Figure: 2.0B
- DC Power: 5V
- SMA Connector

Performance measured @ 2000MHz

### Description

LNA-4050 is a wideband high gain Low Noise Amplifier operates with frequency range for 20MHz to 4000MHz Band.







### Picture









### Electrical Specifications @ +25 °C, Z<sub>in</sub> = Z<sub>out</sub> = 50 Ω, V<sub>cc</sub> = +5V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	20		4000
Gain				
f = 20MHz	dB		22	
f = 500MHz	dB		25	
f = 2000MHz	dB		26	
f = 3000MHz	dB		24	
f = 4000MHz	dB		22	
P <sub>1dB</sub>	dBm		+18	
IP3	dBm		+35	
Noise Figure	dB		2.0	2.2
Reverse Isolation	dB		-45	
VSWR				
Input VSWR			1.6:1	
Output VSWR			1.5:1	
DC Power Supply	V	4.5	5.0	5.5
Supply Current	mA		160	

### Typical Performance @ +25 °C

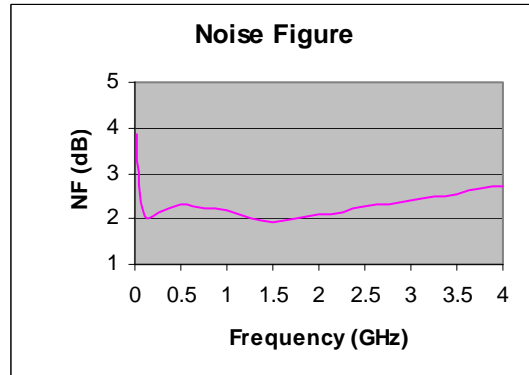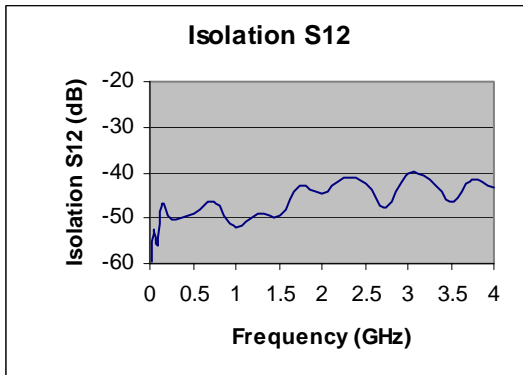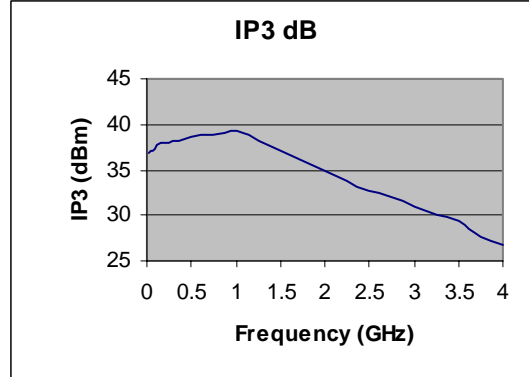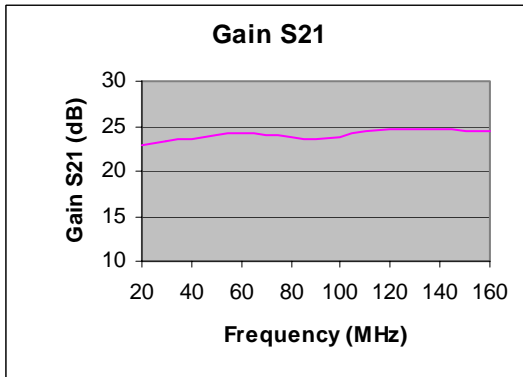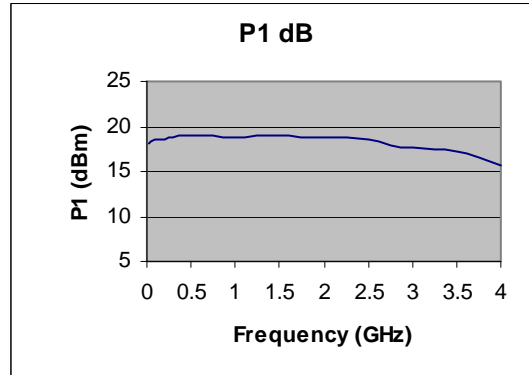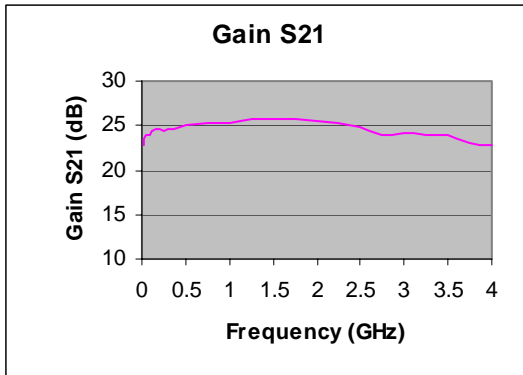


### Typical Performance @ +25 °C

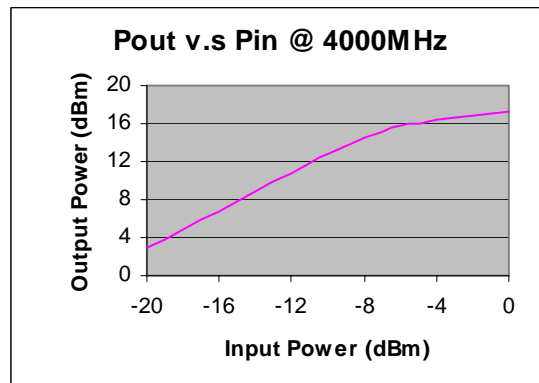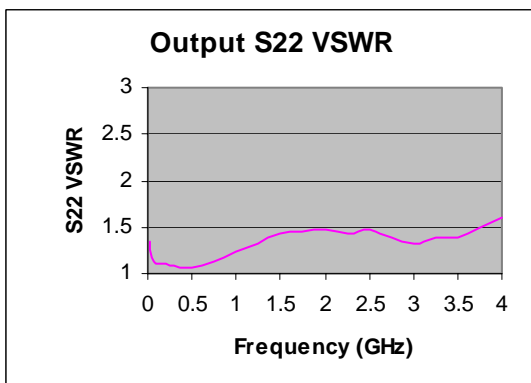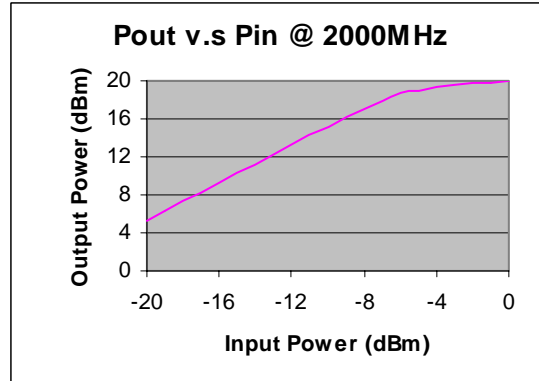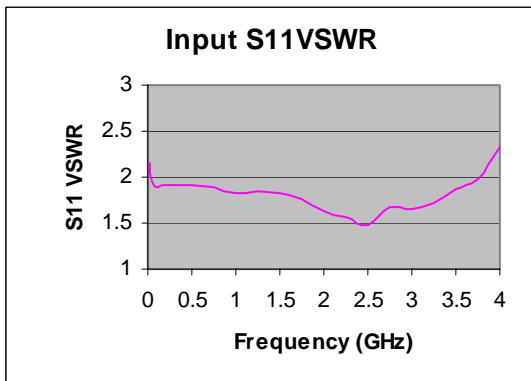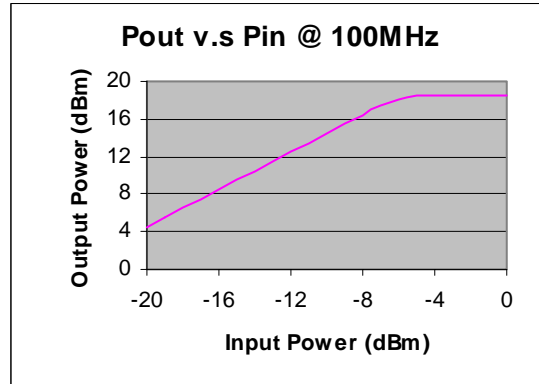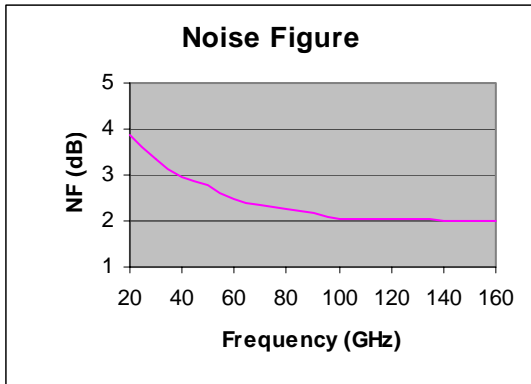

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### Outline

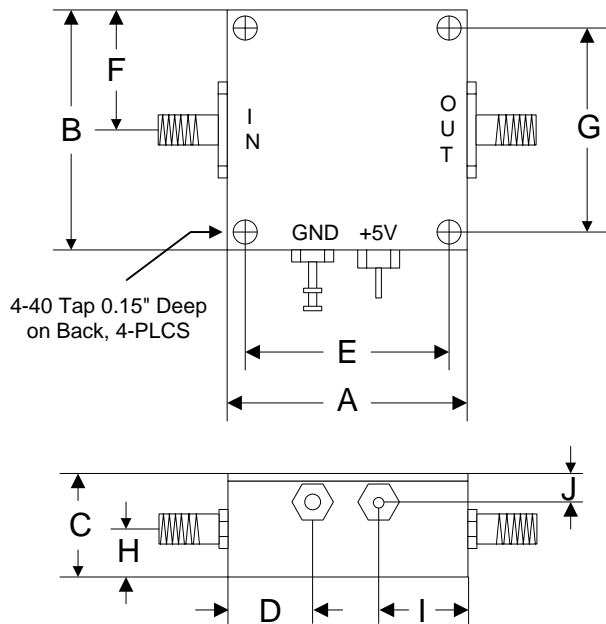

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76