

## LPA Series

## 5MHz – 2400MHz RF Amplifier

### Features

- Frequency Range: 5-2400MHz
- Gain: 20dB
- P<sub>1dB</sub>: +9dBm
- IP3: +18dBm
- Noise Figure: 6.0dB
- DC Power: 3V/37mA
- SMA Connector

Performance Test @ 1500MHz

### Description

LPA-2-15 is a wideband low voltage RF Amplifier operates with frequency range from 5MHz to 2400MHz.







### Picture









### Electrical Specifications @ +25 °C, Z<sub>S</sub> = Z<sub>L</sub> = 50 Ω, V<sub>cc</sub>= +3V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	5		2400
Gain				
f = 5 MHz	dB		17	
f = 500 MHz	dB		20	
f = 1000 MHz	dB		20	
f = 1500MHz	dB		20	
f = 2000 MHz	dB		17	
f = 2400 MHz	dB		15	
P <sub>1dB</sub> at 1500MHz	dBm		+9	
P <sub>SAT</sub> at 1500MHz	dBm		+11	
IP3 at 1500MHz	dBm		+18	
Noise Figure at 1500MHz	dB		6	7.5
Reverse Isolation	dB		-30	
VSWR				
Input VSWR			1.6:1	
Output VSWR			2.5:1	
DC Power Supply	V	2.7	3.0	3.3
Supply Current	mA		37	

### Typical Performance @ +25 °C

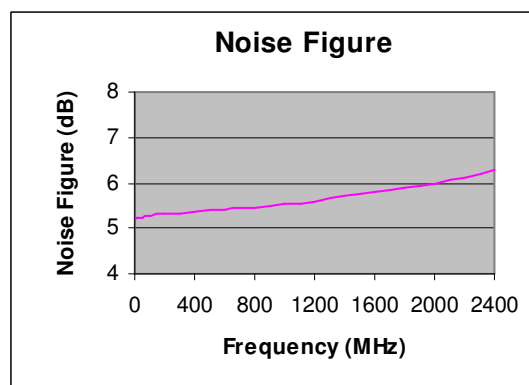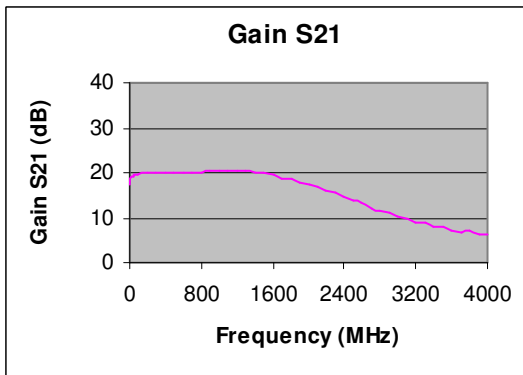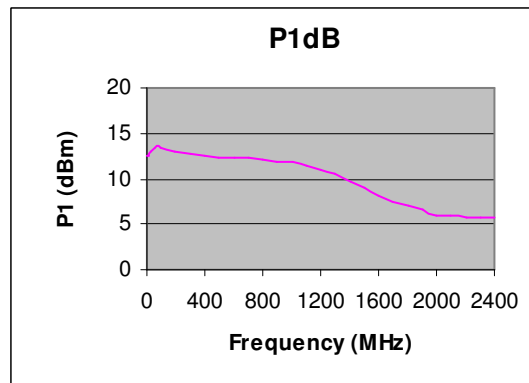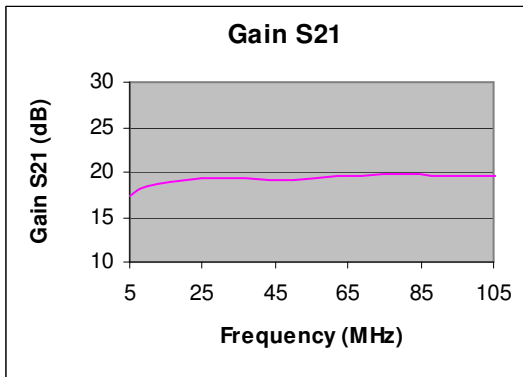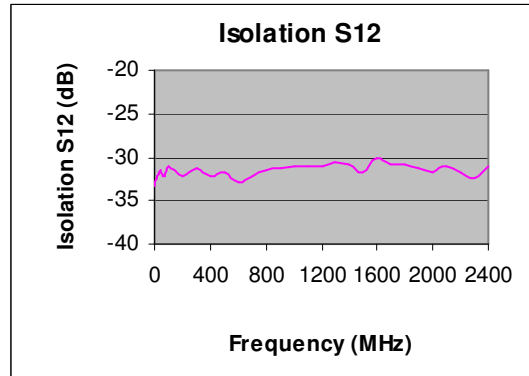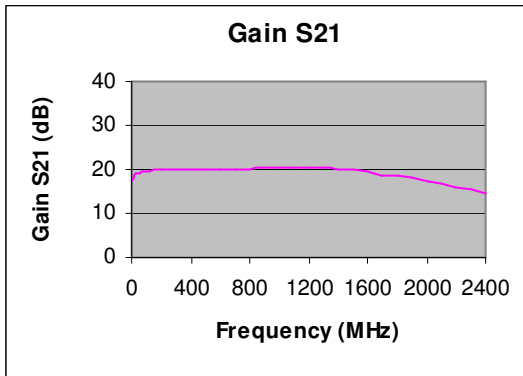


### Typical Performance @ +25 °C

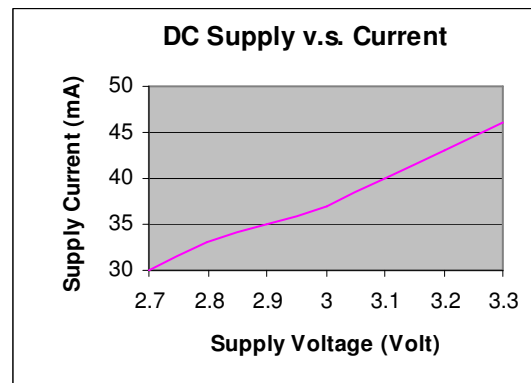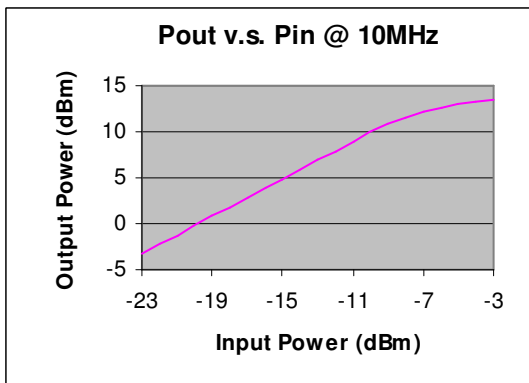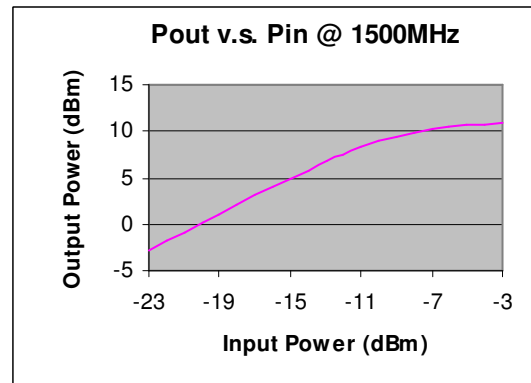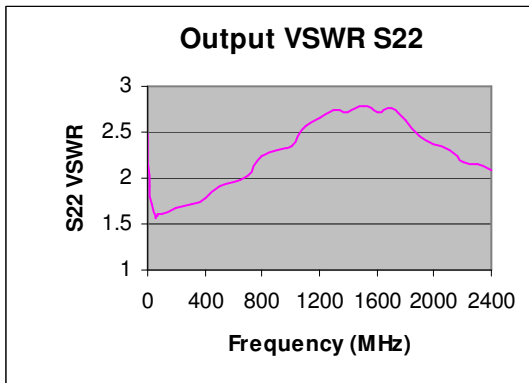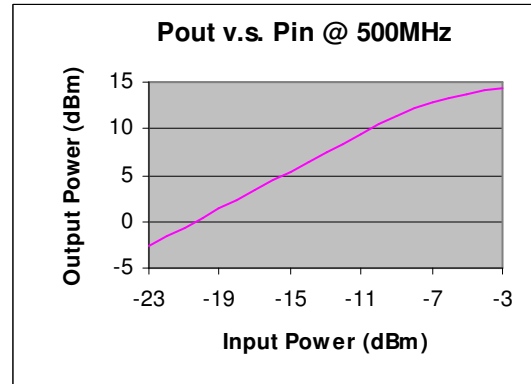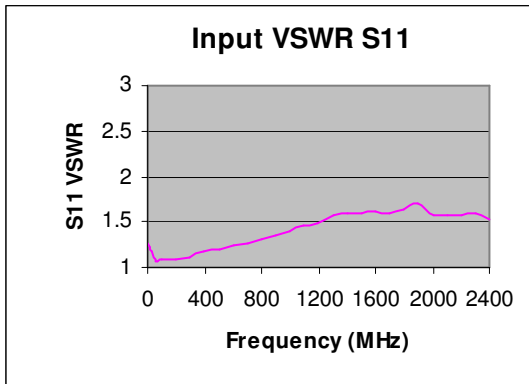

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+3.6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

### Outline

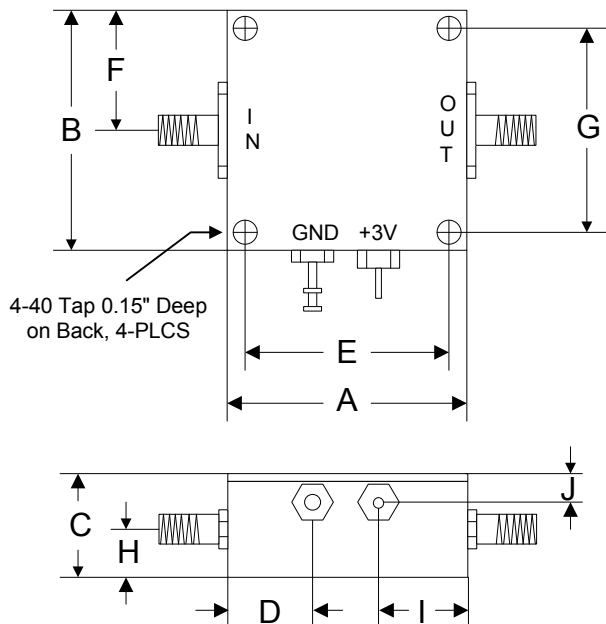

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76