

## LPA Series

## 100 – 6000MHz RF Amplifier

### Features

- Frequency Range: 100-6000MHz
- Gain: 34dB
- P<sub>1dB</sub>: +19dBm
- IP3: +32dBm
- Noise Figure: 4.2dB
- DC Power: 12V
- SMA Connector

Performance measured @ 2000MHz

### Description

LPA-6-26 is a wideband high gain RF Amplifier operates with frequency range from 100MHz to 6000MHz.







### Picture



### Electrical Specifications @ +25 °C, Z<sub>S</sub> = Z<sub>L</sub> = 50 Ohms

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	100		6000
Gain	f = 100MHz		35.0	
	f = 2000MHz		34.0	
	f = 4000MHz		29.0	
	f = 6000MHz		26.0	
P <sub>1dB</sub>	f = 100MHz		+19.7	
	f = 2000MHz		+19.0	
	f = 4000MHz		+16.5	
	f = 6000MHz		+12.5	
IP3	f = 2000MHz		+32	
Noise Figure	f = 2000MHz		4.2	
VSWR	f = 100-6000MHz			
	Input VSWR		2.0:1	
	Output VSWR		2.0:1	
DC Power Supply	V	9	12	15
Supply Current	mA		125	


### Typical Performance @ +25 °C

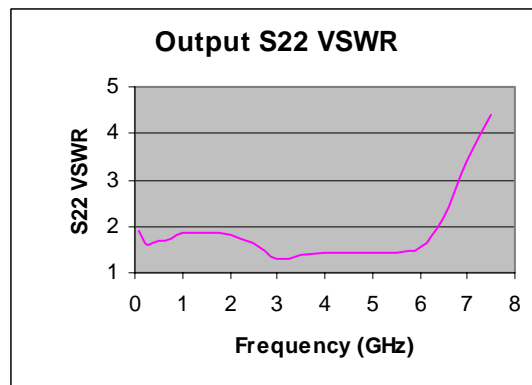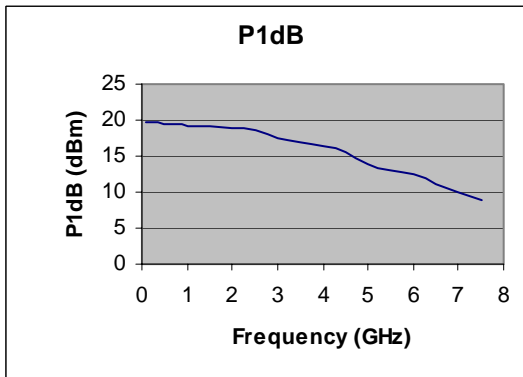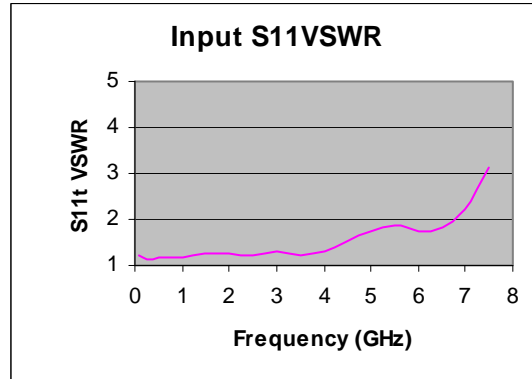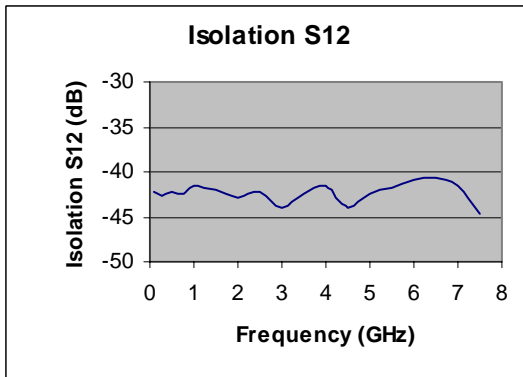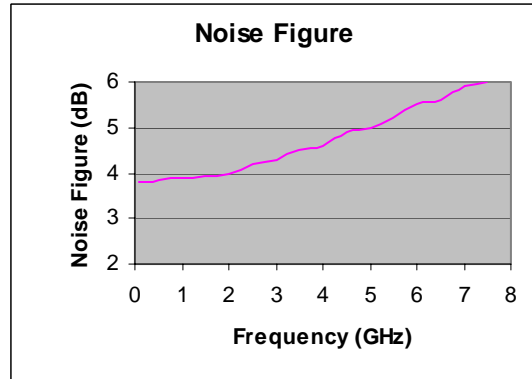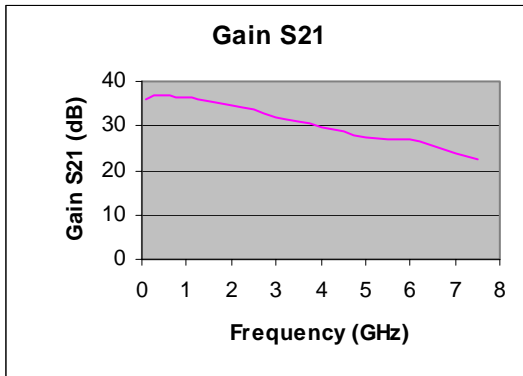

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

### Outline

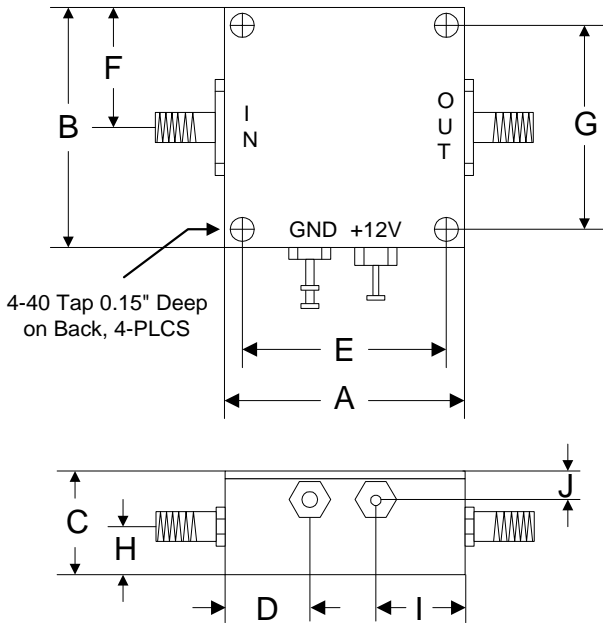

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76