


**FPS Series**

**0.1–20GHz Divide-By-4 Prescaler**

**Features**

- Input Frequency: 0.1-20GHz
- Output Frequency: 0.025-5GHz
- Divide Ratio: 4
- Output Power: 0dBm
- Phase Noise: -150dBc/Hz
- DC Power: 5V
- Internal Voltage Regulator
- Reverse Voltage Protection
- SMA Female Connector

**Picture**

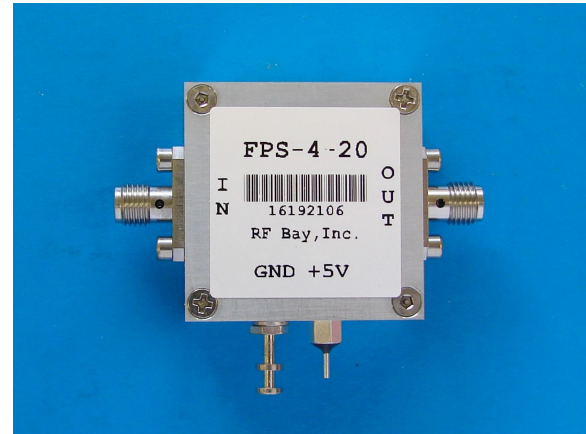


**Description**

FPS-4-20 is a wideband frequency 0.1 – 20GHz divider with divide ratio of 4.

**Electrical Specifications @ +25 °C,  $Z_{IN} = Z_{OUT} = 50 \Omega$ , DC Supply = +5V**

Parameter	Unit	Minimum	Typical	Maximum
Input Frequency Range	GHz	0.1		20
Output Frequency Range	GHz	0.025		5
Fixed Divide Ratio			4	
Input Power Range				
f = 0.1GHz – 0.25GHz	dBm	+5	+5	+10
f = 0.25GHz – 1GHz	dBm	-3	0	+10
f = 1GHz – 10GHz	dBm	-16	0	+10
f = 10GHz – 18GHz	dBm	-12	0	+10
f = 18GHz – 20GHz	dBm	-9	0	+10
Output Power				
f = 0.1GHz – 6GHz	dBm	+1	+4	
f = 6GHz – 14GHz	dBm	-4	0	
f = 14GHz – 20GHz	dBm	-6	-2	
SSB Phase Noise (100KHz Offset)	dBc/Hz		-150	
DC Power Supply	V	4.5	5	15
Supply Current	mA		150	170

Typical Performance @ +25 °C

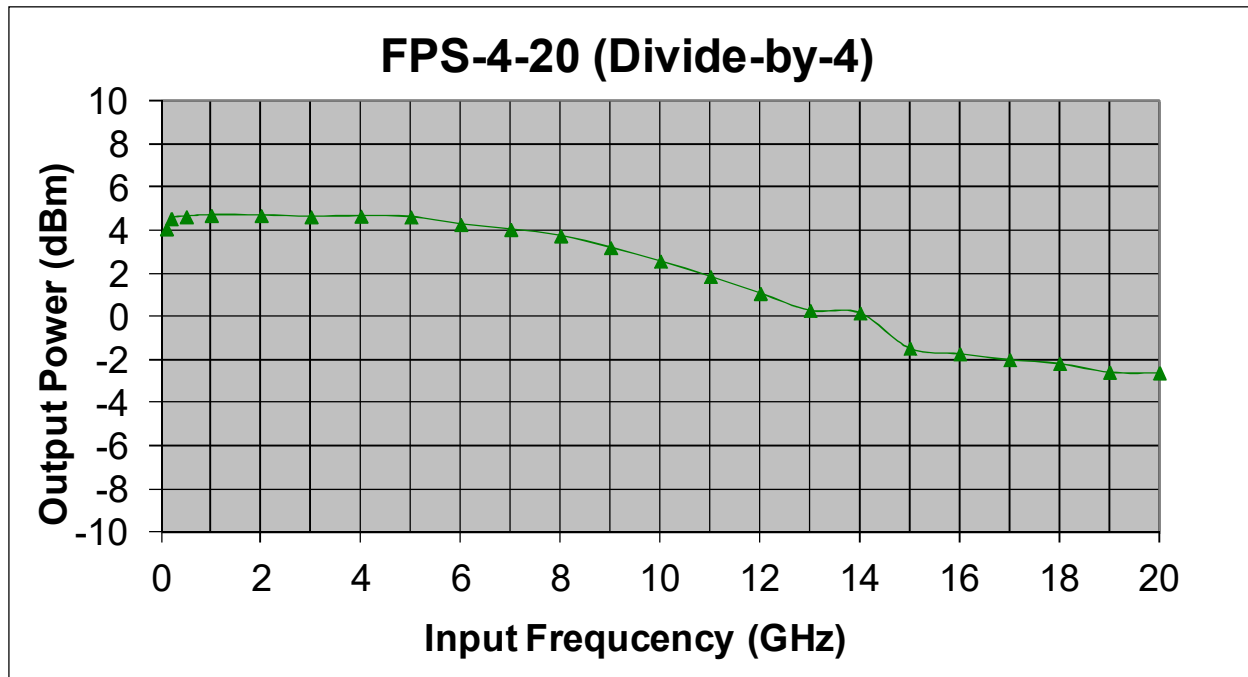

Tested with  $P_{in}=0dBm$

## FPS Series

## 0.1–20GHz Divide-By-4 Prescaler

### Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### ESD Sensitive Material



**WARNING: MUST USE HEAT SINK IF CASE TEMPERATURE EXCEEDS 50 °C**

### Outline

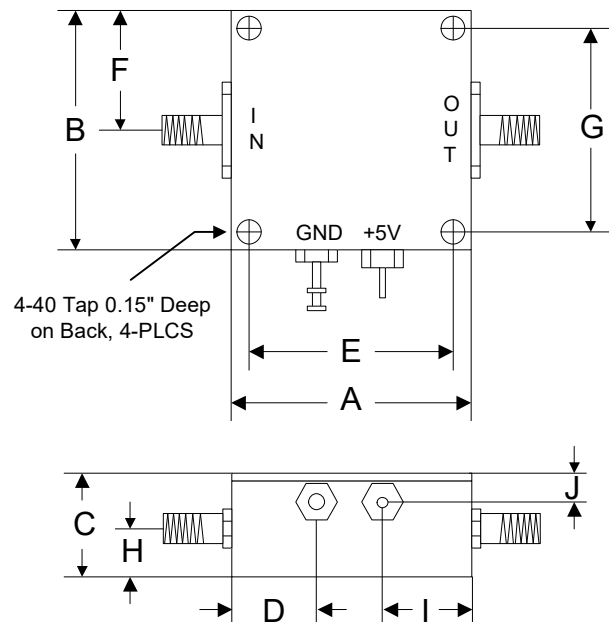

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76