

ENA Series**20 – 600MHz Low Noise Amplifier****Features**

- Frequency Range: 20-600MHz
- Gain: 67dB
- P_{1dB}: +18dBm
- OIP3: +32dBm
- Noise Figure: 2.2dB (typ.)
- DC Power: 12V to 15V @ 140mA
- SMA-female







Photo**Description**

ENA-150T is a high performance Low Noise (& Driver) Amplifier, with standard frequency range of 20 to 600MHz.







Electrical Specifications @+25 °C, Z_{in}=Z_{out}=50 Ω, V_{supply} = +12VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	20		600
Gain (S21) f = 20MHz	dB		70.0	
f = 300MHz	dB	67.0	68.5	
f = 600MHz	dB		67.0	
Gain Flatness	dB		±1.5	
Output Power P _{1dB}	dBm		+18	
Saturated Output Power P _{Sat}	dBm		+20	
Output Third Order Intercept IP3	dBm		+32	
Noise Figure	dB		2.2	3.0
Reverse Isolation (S12) @300MHz	dB		-68	
VSWR-Input (S11)	ratio:1	2.1@20MHz	2.1@300MHz	2.4@600MHz
VSWR-Output (S22)	(unitless)	1.6@20MHz	1.5@300MHz	1.5@600MHz
DC Power Supply - voltage	V	11	12	15
DC Power Supply - current	mA		140	
Operating Temperature	°C	-40		+85
Size (RF/DC feedthrough excluded)	Inch	1.79 (L) x 1.10 (W) x 0.45 (H)		
Weight	Oz	1.4		

Typical Performance @+25 °C

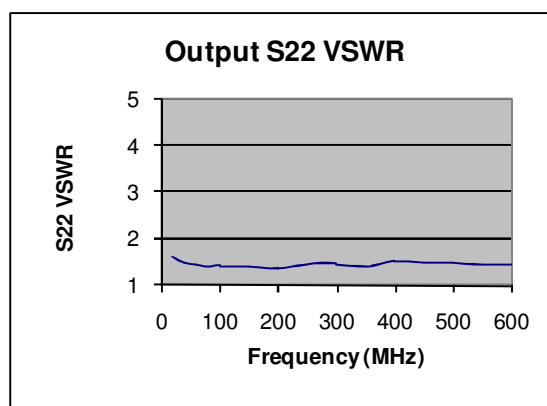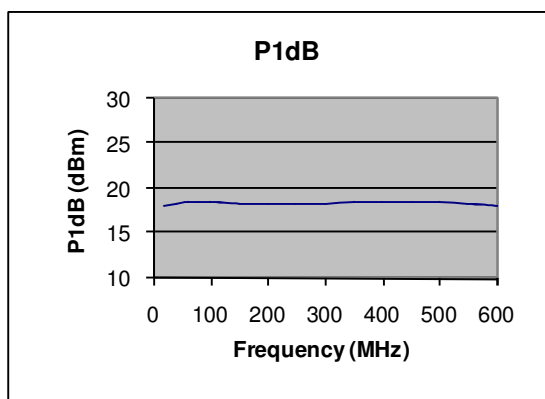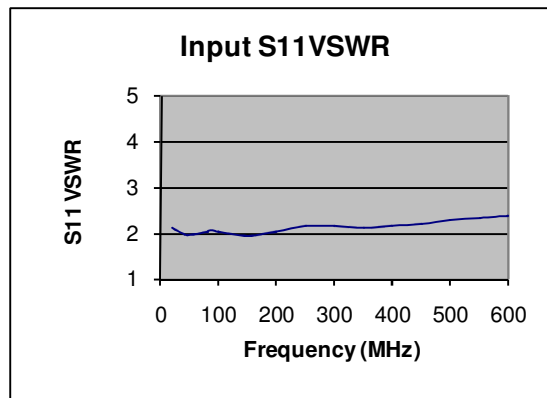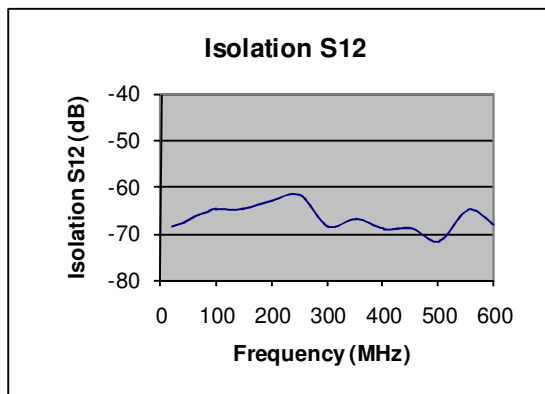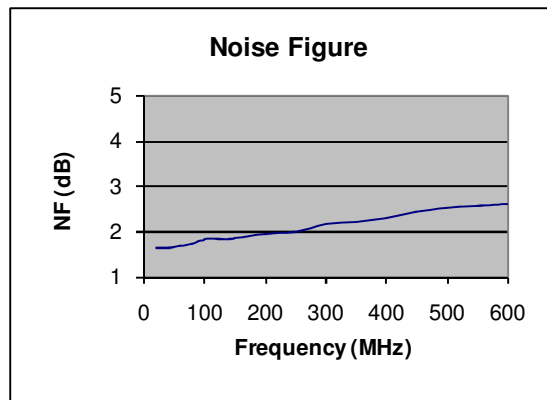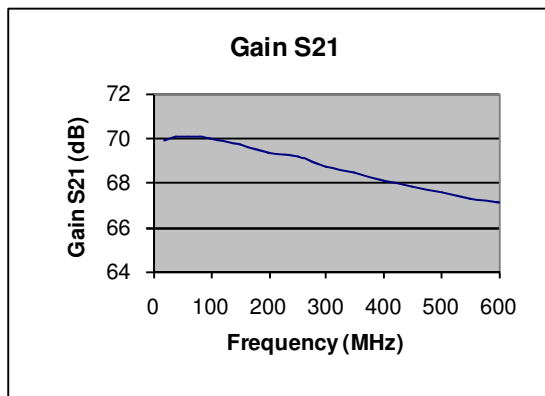

Typical Performance @+25 °C

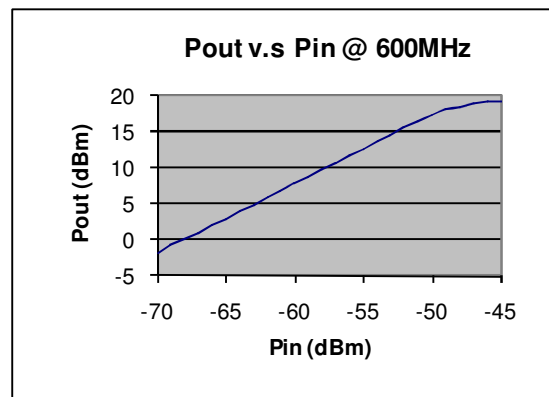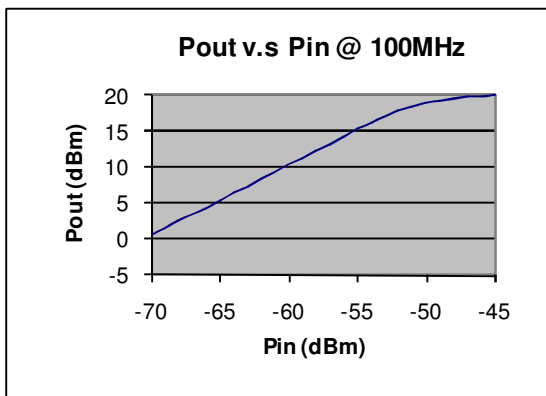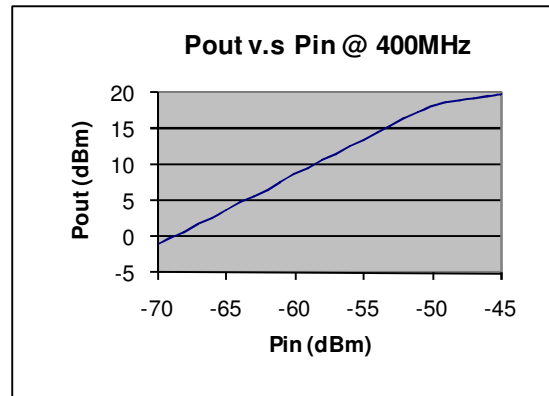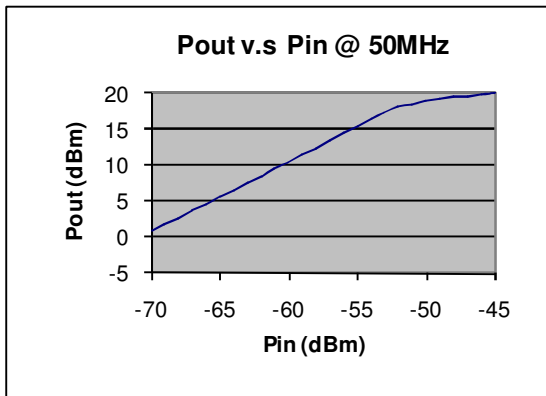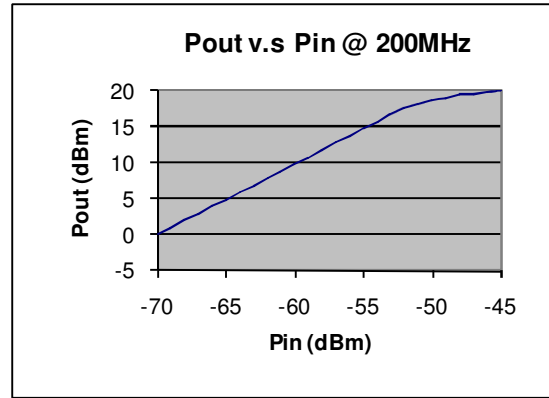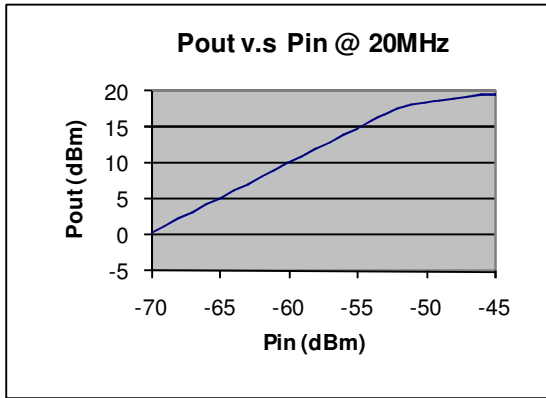

ENA Series

20 – 600MHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+20V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

