


LPA Series

50 – 4200MHz RF Amplifier

Features

- Frequency Range:50 – 4200MHz
- Gain: 34dB
- P_{1dB}: +19dBm
- IP3: +33dBm
- Noise Figure: 4.1dB
- Reverse Voltage Protection
- DC Power: 12V@130mA
- SMA-Female Connector

Photo

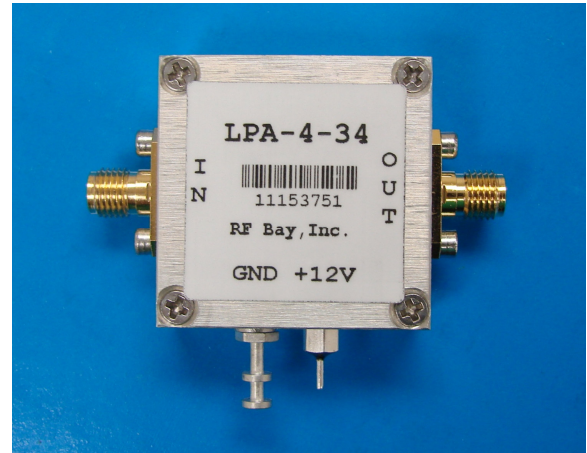

Description

LPA-4-34 is a wideband flat response RF Amplifier, with standard frequency range of 50MHz to 4200MHz.







Electrical Specifications @+25 °C, Z_{in}=Z_{out}=50 Ω, V_{supply} = +12VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	50		4200
Gain (S21)				
f=50MHz	dB		34.5	
f=250MHz	dB		36.3	
f=500MHz	dB		36.3	
f=1000MHz	dB		35.7	
f=2000MHz	dB		34.8	
f=3000MHz	dB		33.8	
f=4200MHz	dB		34.0	
Gain Flatness	dB		±1.5	±2.0
Output Power P _{1dB}	f=2000MHz dBm		+19	
Output IP3	f=2000MHz dBm		+33	
Noise Figure	dB		4.1	
Reverse Isolation (S12)	dB		-44	
VSWR-Input (S11)	ratio:1		1.6:1	
VSWR-Output (S22)	ratio:1		1.8:1	
DC Power Supply - voltage	V	10	12	15
DC Power Supply - current	mA		130	

LPA Series

50 – 4200MHz RF Amplifier







Typical Performance @ +25 °C

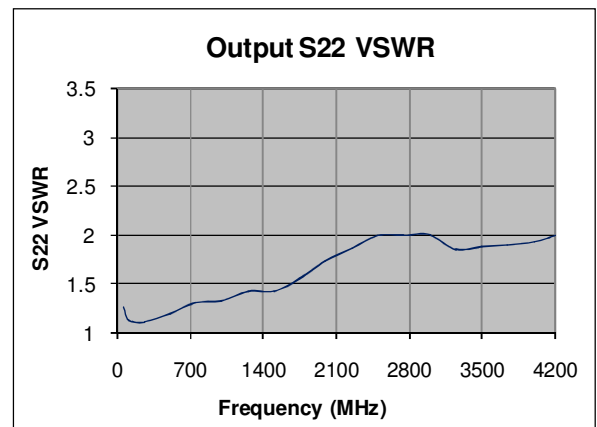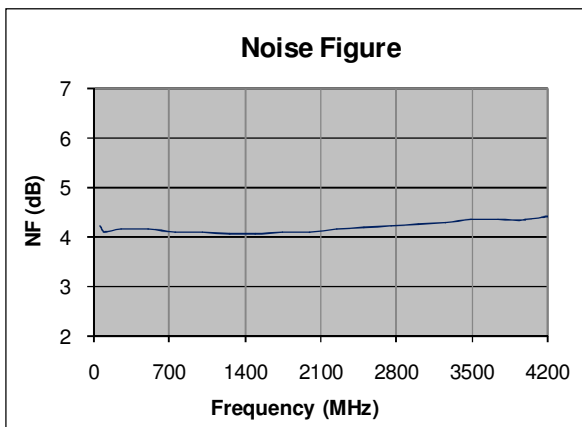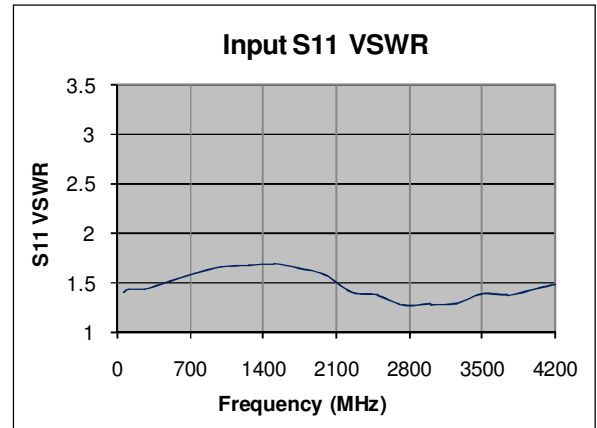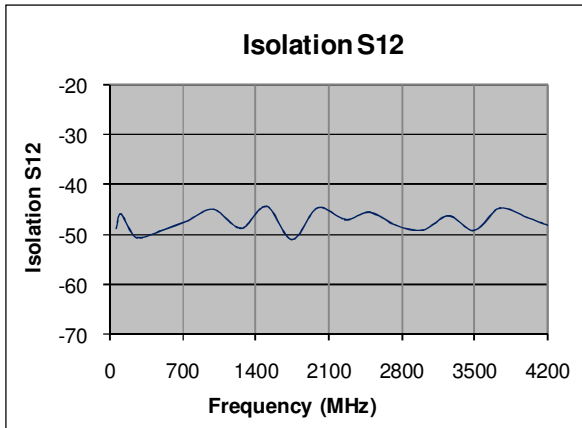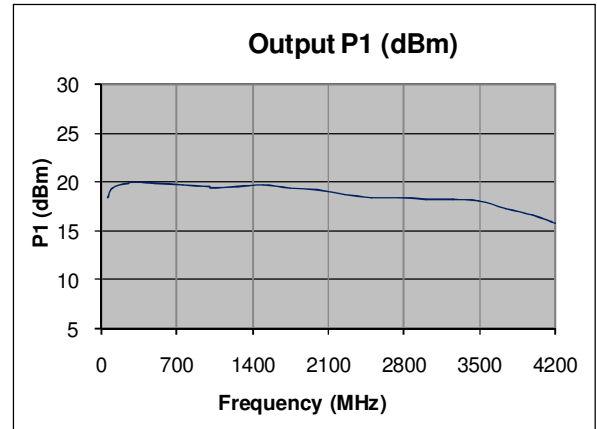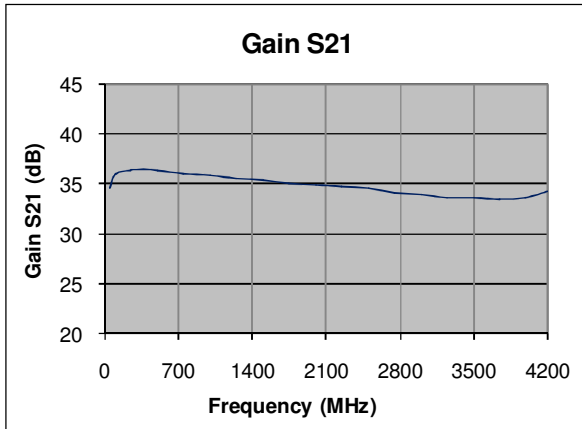

LPA Series

50 – 4200MHz RF Amplifier


Typical Performance @ +25 °C

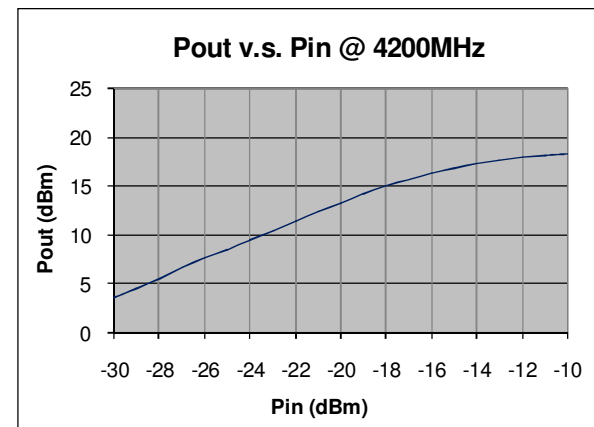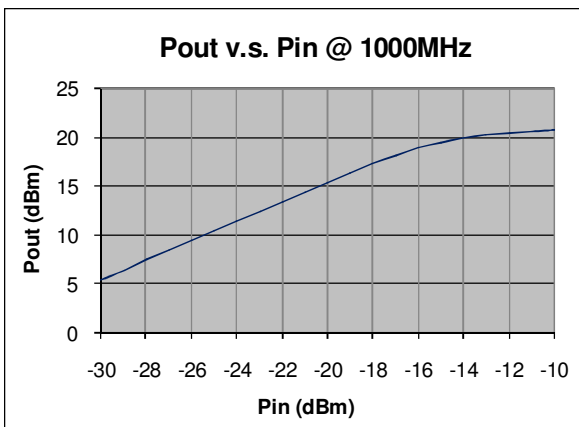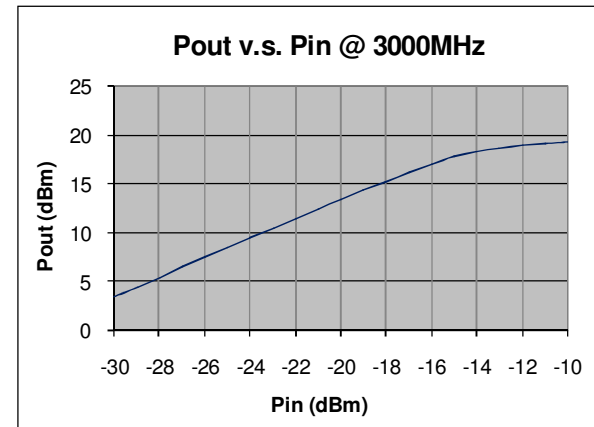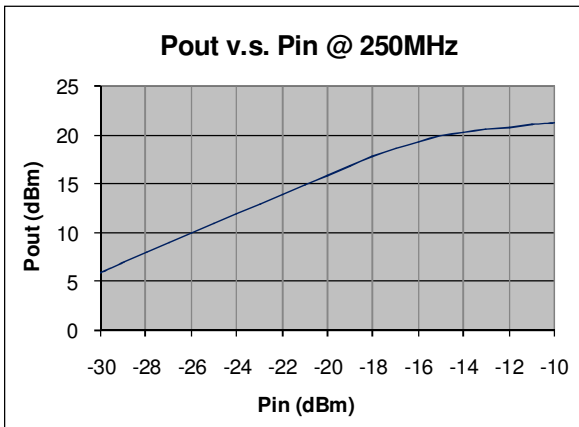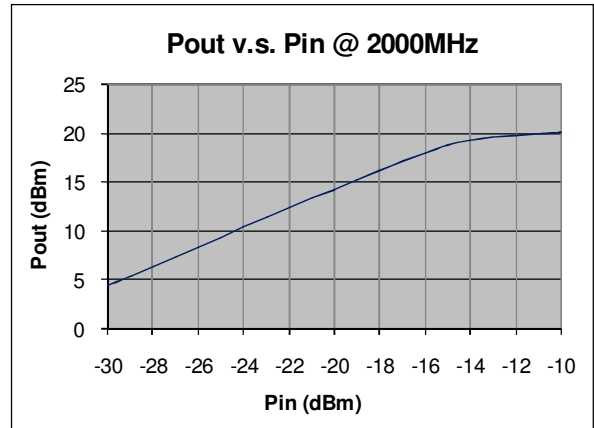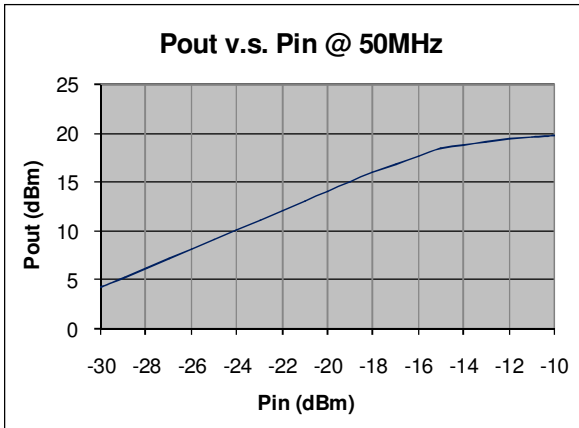

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage (Survival)	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

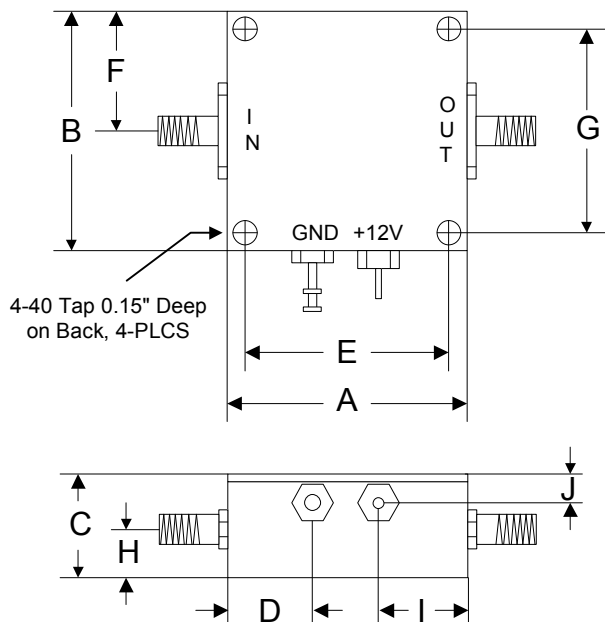

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76