


2.4mm In Series


DC – 50GHz Precision Adapter

2.4mm – 2.4mm Adapter Specifications:


Frequency	DC – 50GHz
Impedance	50 Ω
Durability	500 Cycles/500 Cycles (min.)
Operating Temperature	-55 °C ~ +165 °C
Housing	Stainless Steel SU303 Polished/Passivated
Center Contact	Beryllium Copper Gold Plated (MIL-G-45204)
Insulators	PEI/PEI
2.4mm Interfaces	PER IEEE STD 287-2007

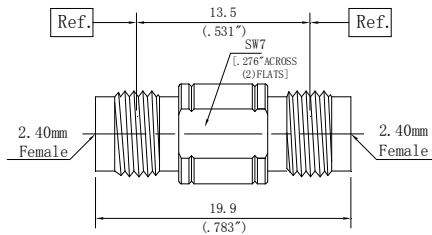

Description	2.4mm (f) to 2.4mm (f)
Part No.	A240F240F
VSWR	DC-50GHz . . .1.20:1 (max)

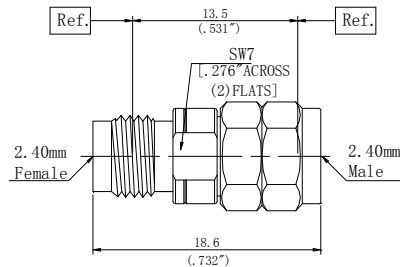

Description	2.4mm (f) to 2.4mm (m)
Part No.	A240F240M
VSWR	DC-50GHz . . .1.15:1 (max)

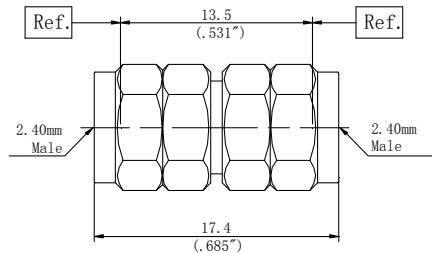

Description	2.4mm (m) to 2.4mm (m)
Part No.	A240M240M
VSWR	DC-50GHz . . .1.15:1 (max)