


2.92mm In Series


DC – 40GHz Precision Adapter

2.92mm – 2.92mm Adapter Specifications:


Frequency	DC – 40GHz
Impedance	50 Ω
Durability	500 Cycles/500Cycles (min.)
Operating Temperature	-55 °C ~ +165 °C
Housing	Stainless Steel SU303 Polished/Passivated
Center Contact	Beryllium Copper Gold Plated (MIL-G-45204)
Insulators	PEI/PEI
2.92mm Interfaces	PER MIL STD 348A

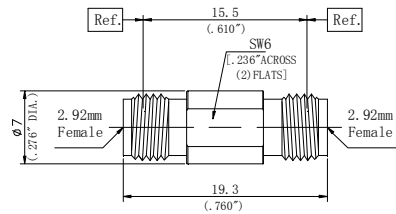

Description	2.92mm (f) to 2.92mm (f)
Part No.	A292F292F
VSWR	DC-40GHz . . .1.20:1 (max)

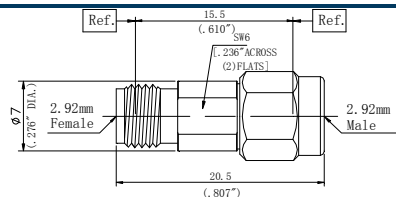

Description	2.92mm (f) to 2.92mm (m)
Part No.	A292F292M
VSWR	DC-40GHz . . .1.15:1 (max)

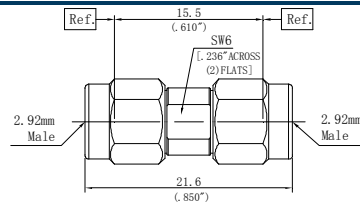

Description	2.92mm (m) to 2.92mm (m)
Part No.	A292M292M
VSWR	DC-40GHz . . .1.15:1 (max)