


Between Series


DC – 33GHz Precision Adapter

3.5mm – 2.92mm Adapter Specifications:


Frequency	DC – 33GHz
Impedance	50 Ω
Durability	500 Cycles/500Cycles (min.)
Operating Temperature	-55 °C ~ +165 °C
Housing	Stainless Steel SU303 Polished/Passivated
Center Contact	Beryllium Copper Gold Plated (MIL-G-45204)
Insulators	PEI/PEI
3.5mm/2.92mm Interfaces	PER IEC-60169/PER MIL STD 348A




Description	3.5mm (f) to 2.92mm (f)
Part No.	A350F292F
VSWR	DC-33GHz . . .1.15:1 (max)

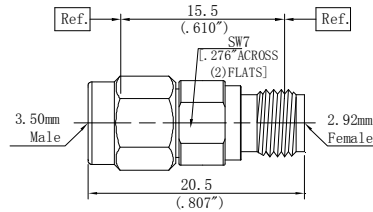

Description	3.5mm (m) to 2.92mm (f)
Part No.	A350M292F
VSWR	DC-33GHz . . .1.15:1 (max)

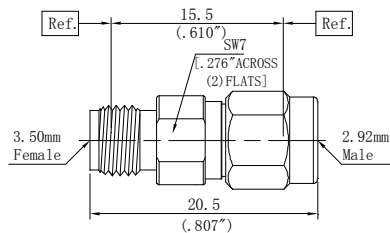

Description	3.5mm (f) to 2.92mm (m)
Part No.	A350F292M
VSWR	DC-33GHz . . .1.15:1 (max)

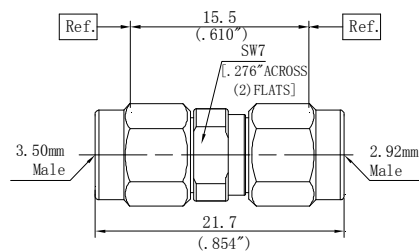

Description	3.5mm (m) to 2.92mm (m)
Part No.	A350M292M
VSWR	DC-33GHz . . .1.15:1 (max)