

## VCO Series

## 2400-2800MHz VOLTAGE CONTROLLED OSCILLATOR

### Features

- Frequency: 2400-2800MHz
- Tuning Voltage: 1-11V
- Power Output: +9dBm
- Phase Noise: -92dBc/Hz @ 10KHz offset
- Power Supply: +12V/25mA
- Internal Voltage Regulated
- Reverse DC Protection
- SMA Connector

### Picture



### Description

VCO-2600 is a voltage controlled oscillator module with output frequency range of 2400 to 2800MHz.



### Electrical Specifications @ +25 °C, $Z_{out} = 50 \Omega$ , $V_{supply} = +12V$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	2400		2800
Tuning Voltage	Vdc	1		11
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-92	
Tuning Sensitivity	MHz/V		80	
Power Output	dBm	+6	+9	+13
Harmonic Suppression (2 <sup>nd</sup> )	dBc		-10	
Load Impedance	$\Omega$		50	
Input Capacitance	pF			50
Frequency Pulling	MHz			50
Supply Voltage	V	+11	+12	+15
Supply Current	mA		25	
Operating Temp Range	$^{\circ}C$	-40		+85

VCO Series

**2400-2800MHz VOLTAGE CONTROLLED  
OSCILLATOR**

Typical Performance @ +25 °C

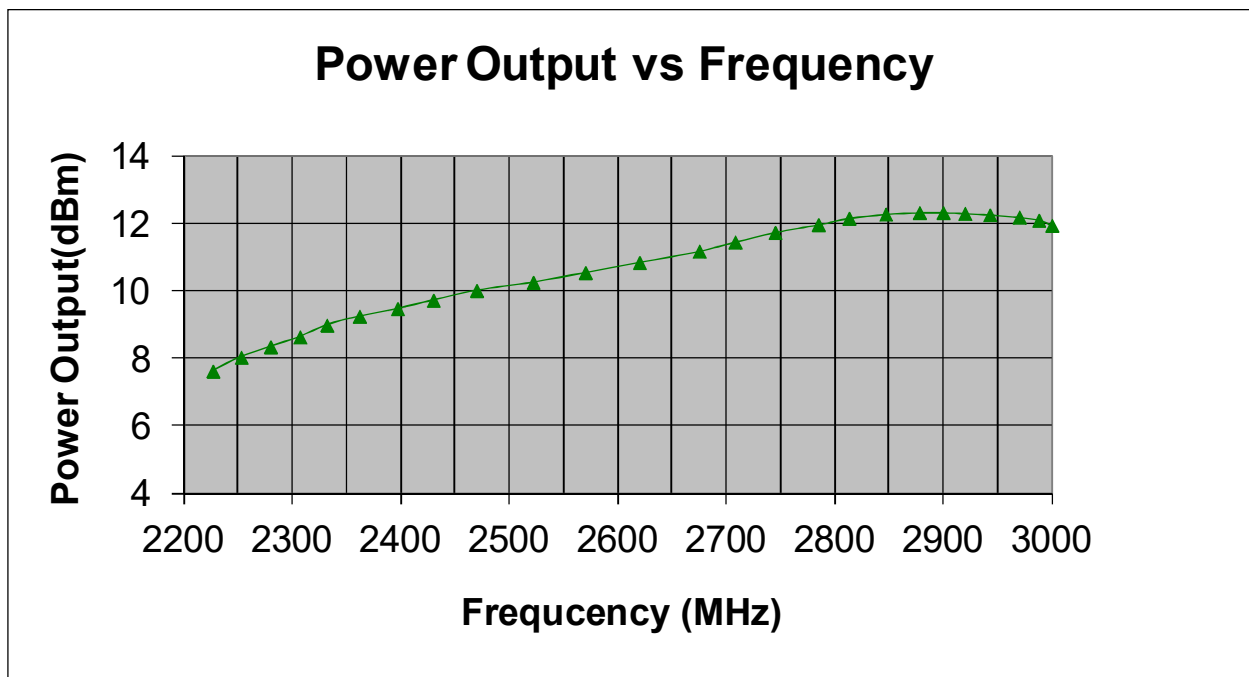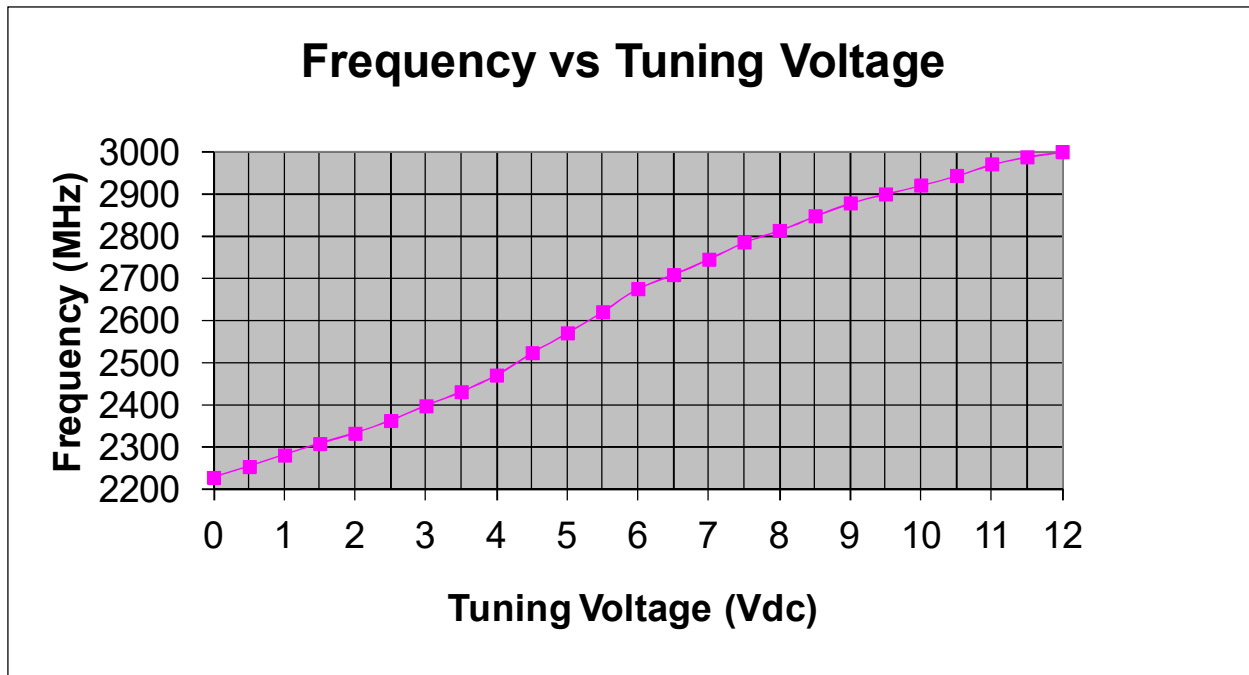


## VCO Series

## 2400-2800MHz VOLTAGE CONTROLLED OSCILLATOR

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+25V
Control Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

### Outline

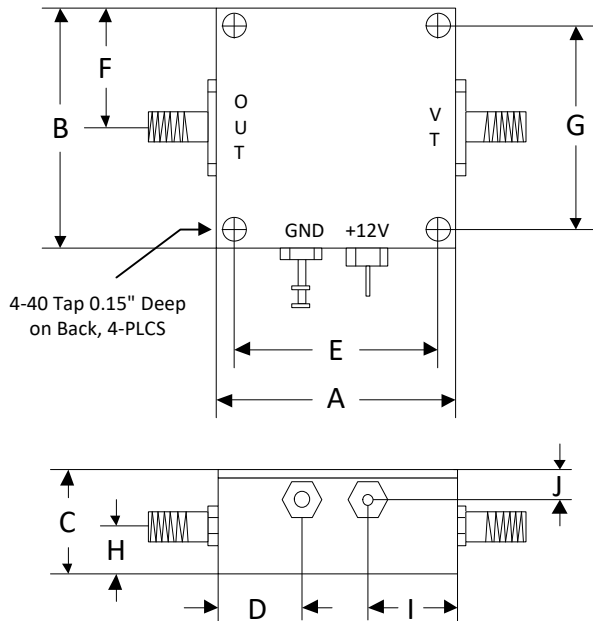

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76