


ENA Series

2 – 18GHz Low Noise Amplifier

Features

- Frequency Range: 2-18GHz
- Gain: 17dB
- P_{1dB}: +23dBm
- OIP3: +32dBm
- Noise Figure: 3.5dB (typ.)
- DC Power: 12V or 15V @ 230mA
- Internally Voltage Regulated
- SMA-female

Photo

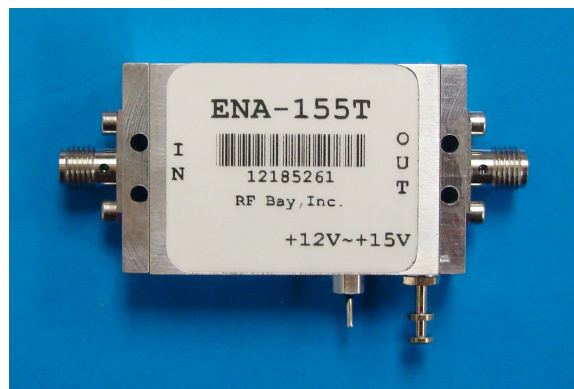

Description

ENA-155T is a wideband Low Noise Amplifier, with frequency range of 2 to 18GHz.

Electrical Specifications @+25 °C, Z_{in}=Z_{out}=50 Ω, DC Supply = +12VDC


Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2		18
Gain S ₂₁	f = 2GHz	17.5	19.0	
	f = 10GHz	16.0	17.5	
	f = 18GHz	16.5	18.0	
Gain Flatness	dB		±0.7	±1.0
Output Power P _{1dB}	f = 10GHz	+22	+23	
Saturated Output Power P _{Sat}	f = 10GHz	+23	+24	
Output Third Order Intercept IP ₃	f = 10GHz	+30	+32	
Noise Figure	f = 10GHz		3.5	4.5
Reverse Isolation S ₁₂	f = 10GHz	-28	-33	
Input VSWR S ₁₁	f = 10GHz		2.0:1	2.5:1
Output VSWR S ₂₂	f = 10GHz		1.5:1	2.0:1
DC Power Supply - voltage	V	11	12	15
DC Power Supply - current	mA		230	270

WARNING: MUST USE HEAT SINK IF CASE TEMPERATURE EXCEEDS 50 °C


ENA Series

2 – 18GHz Low Noise Amplifier

Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

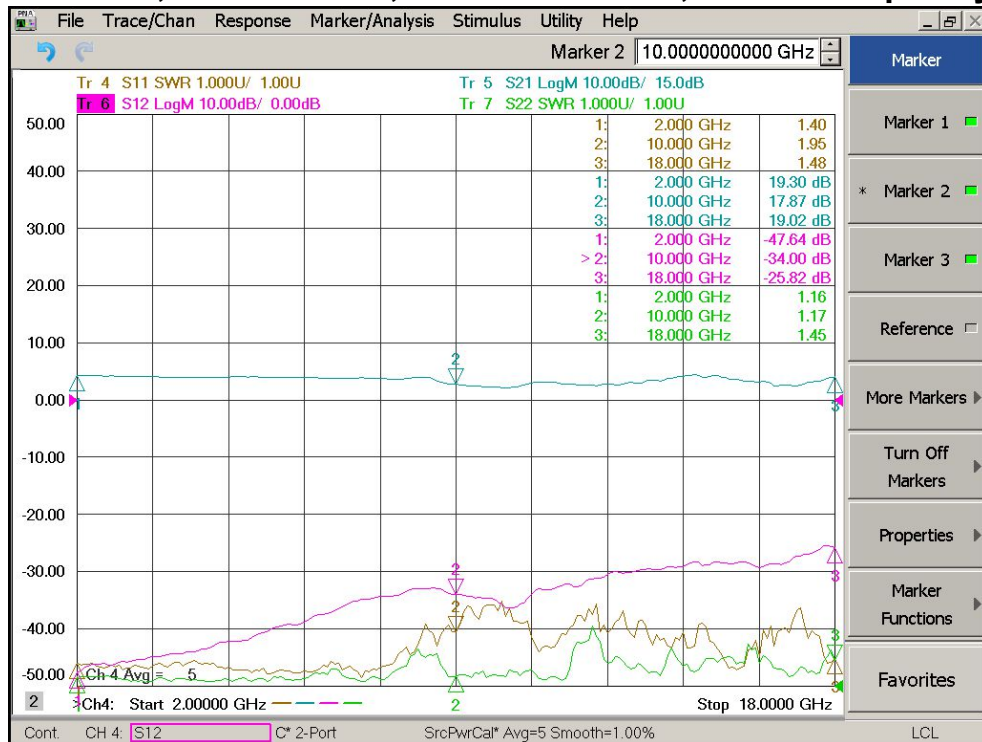


Noise Figure vs Frequency

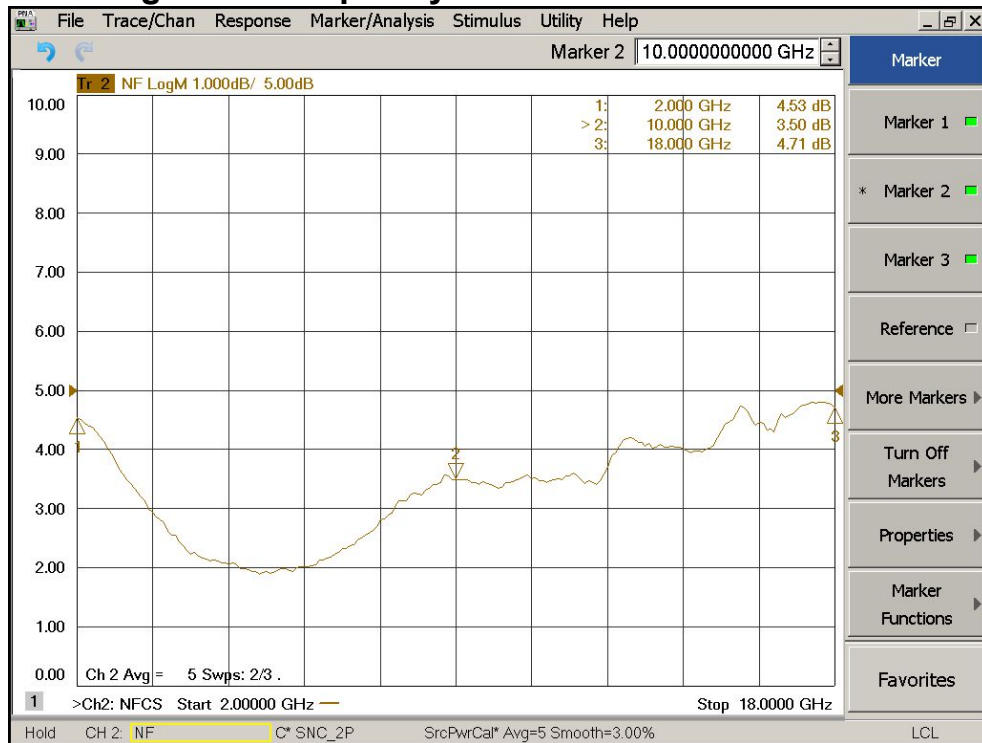


ENA Series

2 – 18GHz Low Noise Amplifier

Output P1dB vs Frequency

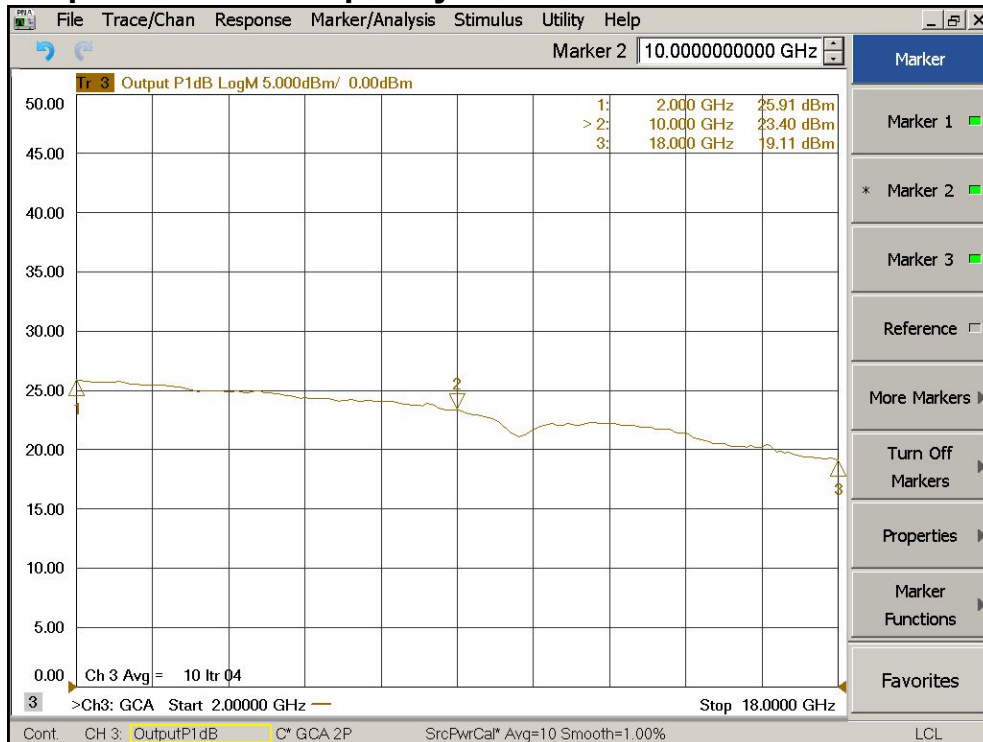

Output IP3 vs Frequency

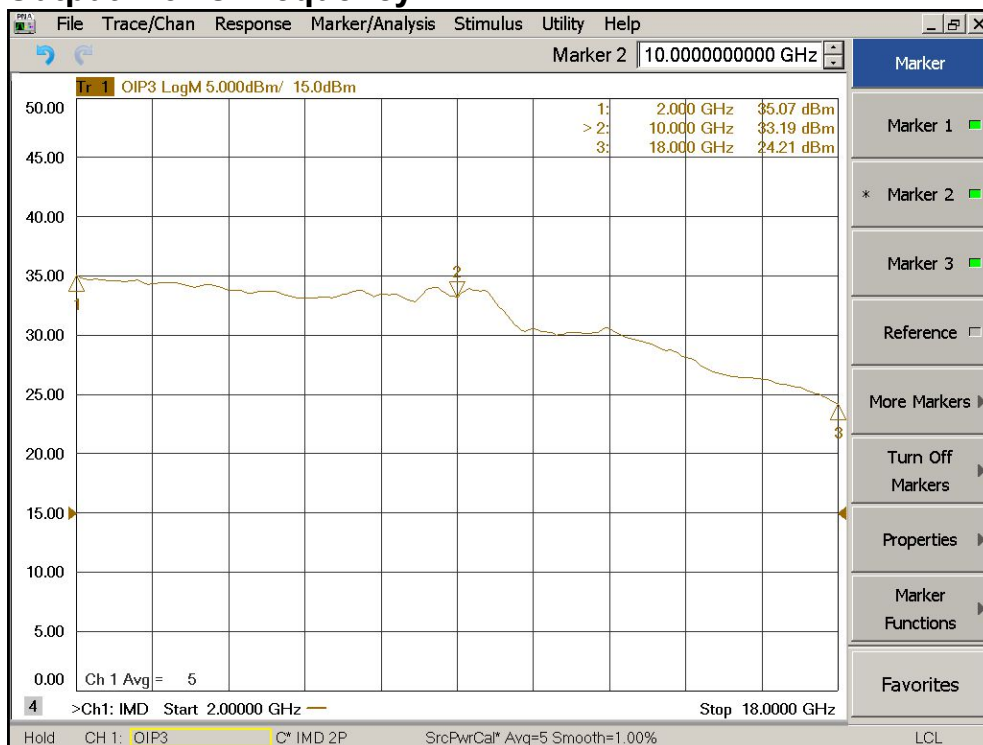

ENA Series

2 – 18GHz Low Noise Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage	+20V
RF Input Power	+23dBm
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

ESD Sensitive Material



Outline

