


## SPA Series

## 760-960MHz 10W RF Power Amplifier

### Features

- Frequency Range: 760-960MHz
- Gain: 40dB
- P<sub>out</sub>: +40dBm
- P<sub>sat</sub>: +41dBm
- IP3: +50dBm
- DC Power: 12V
- SMA Connector

### Picture

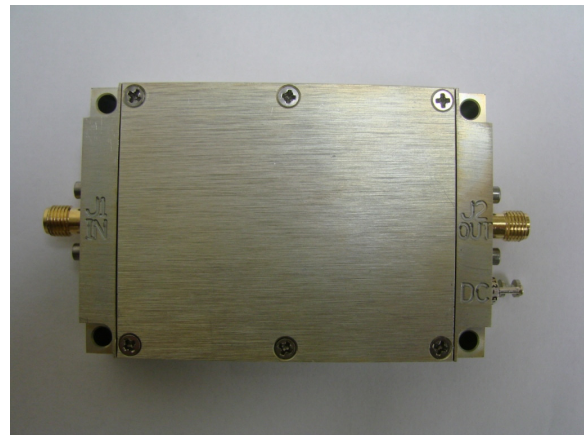

Performance measured @ 860MHz

### Description







SPA-860 is a 10Watt (+40dBm) output RF Power Amplifier operating from single 12V DC power supply with frequency range in 760-960MHz.

### Electrical Specifications @ +25 °C, Z<sub>S</sub> = Z<sub>L</sub> = 50 Ω, V<sub>cc</sub> = +12V







Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	760		960
Small Signal Gain	dB		40	
Output Power P <sub>out</sub> @ P <sub>in</sub> = 0dBm	dBm		+40	
Saturated Power P <sub>sat</sub> @ P <sub>in</sub> = +5dBm	dBm		+41	
IP3	dBm		+50	
Reverse Isolation	dB		-74	
Efficiency at P <sub>out</sub> = +40dBm	%		32	
VSWR Input			1.3:1	
DC Power Supply	V		+12	
Supply Current	mA		2750	
Size (Excluding SMA Connector)	inch	3.000" x 2.000" x 0.625"		
Weight	Oz.	4.8 (135g)		

**Warning: adequate heatsink required for continuous operation, keep amplifier base plate temperature under +65 °C.**

### Typical Performance @ +25 °C

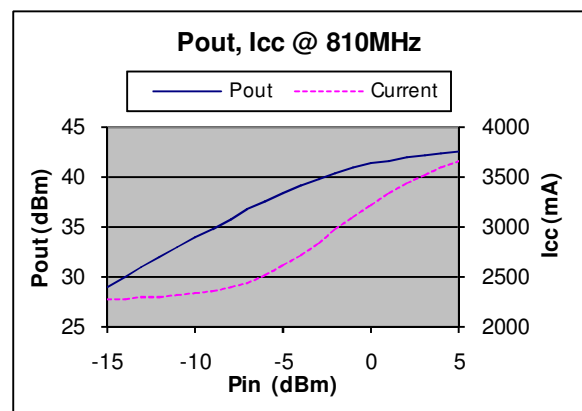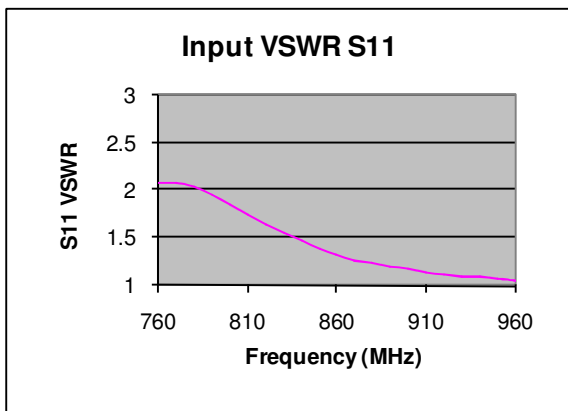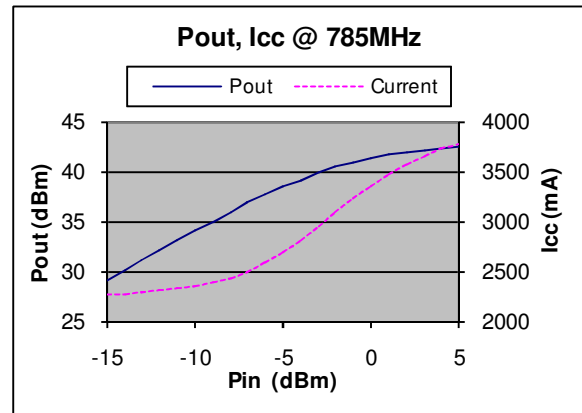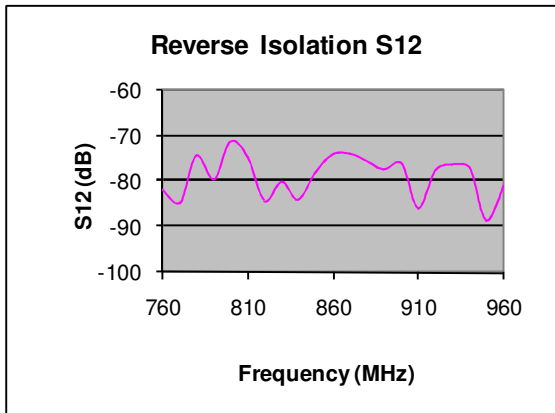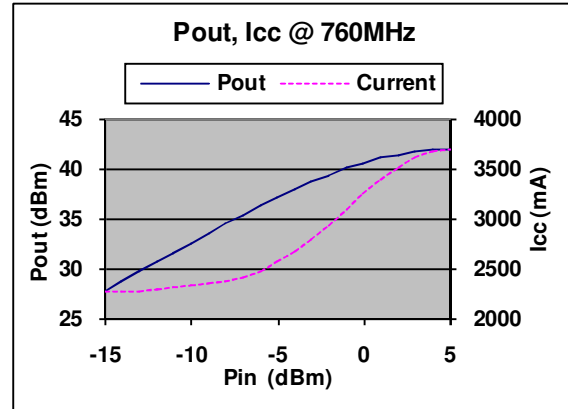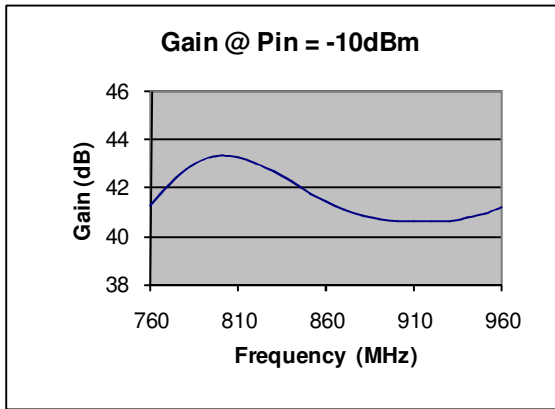

### Typical Performance @ +25 °C

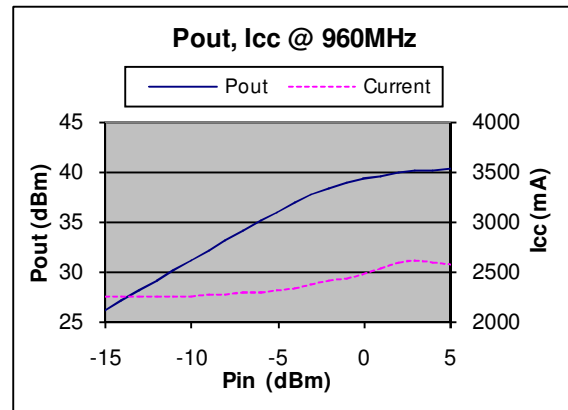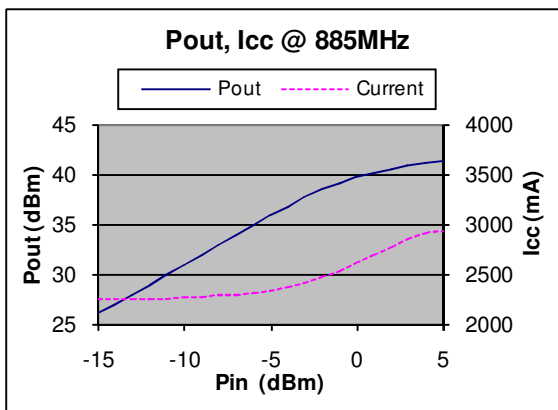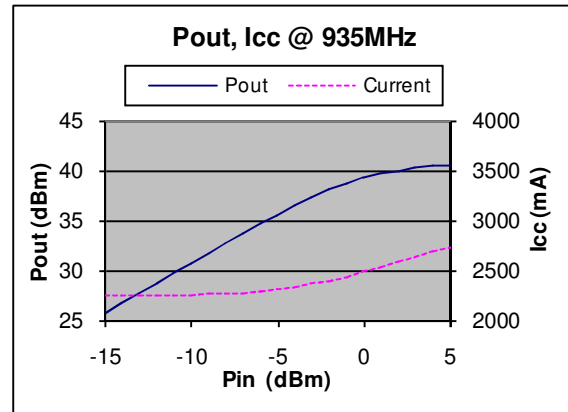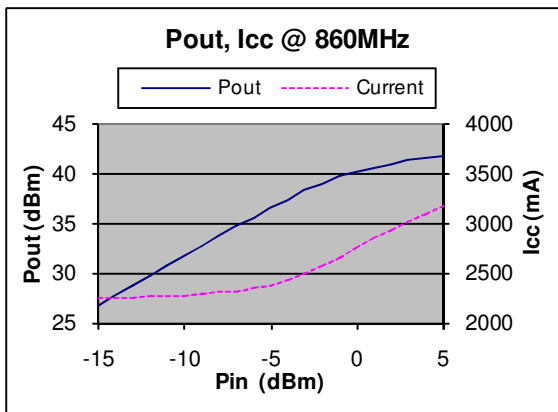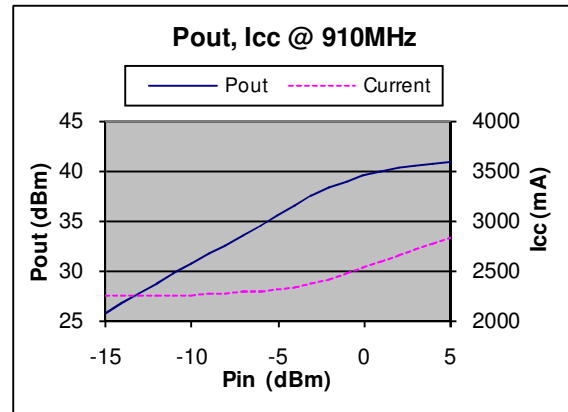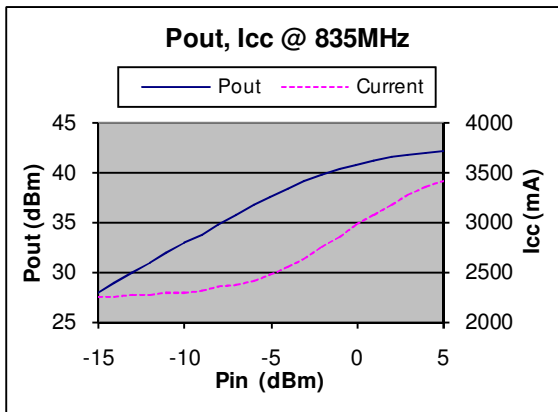


## SPA Series

## 760-960MHz 10W RF Power Amplifier

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+16V
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +100 °C

### Outline

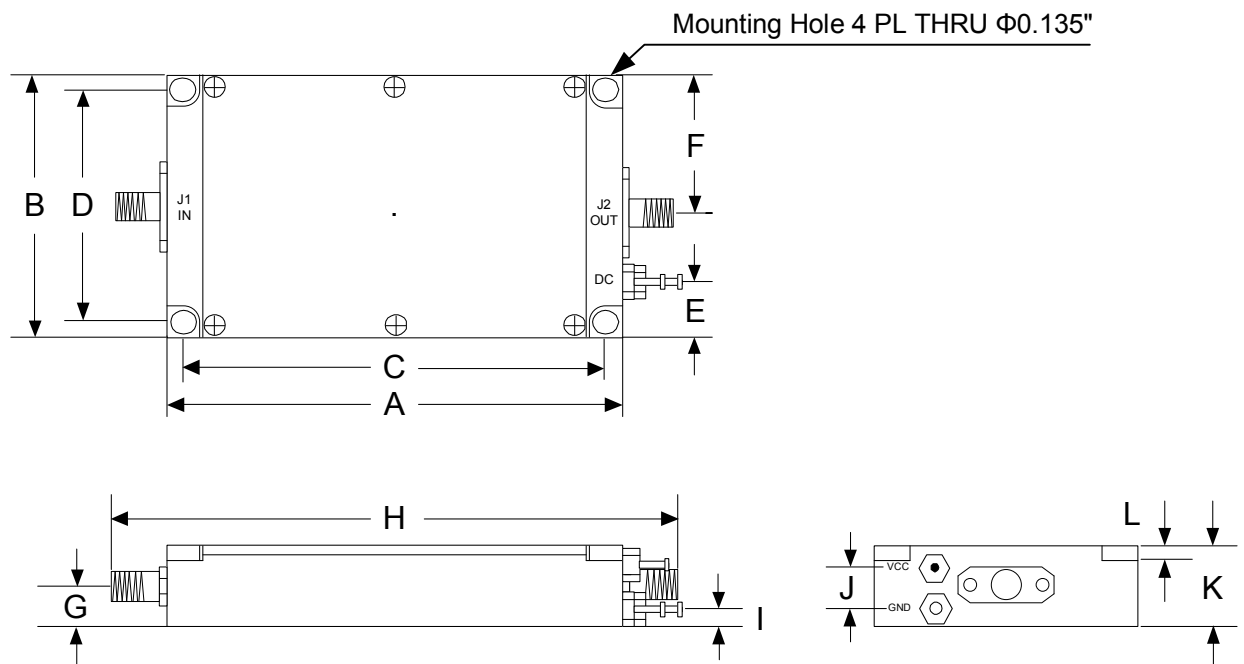

	A	B	C	D	E	F	G	H	I
<b>Inch</b>	3.000	2.000	2.750	1.750	0.500	1.000	0.300	3.750	0.125
<b>mm</b>	76.20	50.80	69.85	44.45	12.70	25.40	7.62	95.25	3.18
	J	K	L						
<b>Inch</b>	0.300	0.625	0.150						
<b>mm</b>	7.62	15.88	3.81						