

## LNA Series

## 1800 – 2200MHz Low Noise Amplifier

### Features

- Frequency Range: 1800-2200MHz
- Gain: 17.5dB
- P<sub>1dB</sub>: +14dBm
- IP3: +25dBm
- Noise Figure: 1.3dB
- DC Power: 6 - 24V
- SMA Connector

Performance measured @ 2000MHz

### Description

LNA-1822 is a wideband Low Noise Amplifier operates with frequency range useable from 1800 to 2200MHz.







### Picture



### Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1800		2200
Gain f = 1800MHz	dB		18	
f = 2000MHz	dB	16	17.5	
f = 2200MHz	dB		16.5	
P <sub>1dB</sub> f = 2000MHz	dBm		+13	
IP3 f= 2000MHz	dBm		+25	
Noise Figure	dB		1.3	1.4
Reverse Isolation	dB		-25	
VSWR f = 2000MHz				
Input VSWR			1.7:1	
Output VSWR			1.4:1	
DC Power Supply	V	6	12	24
Supply Current	mA		25	


### Typical Performance @ +25 °C

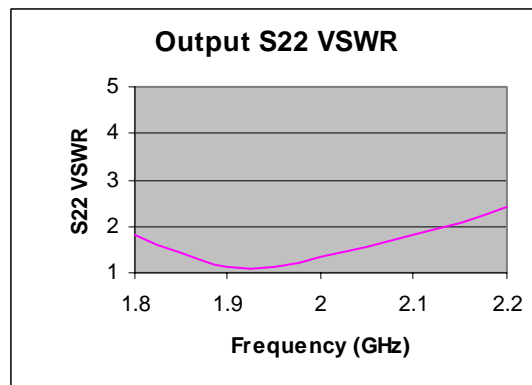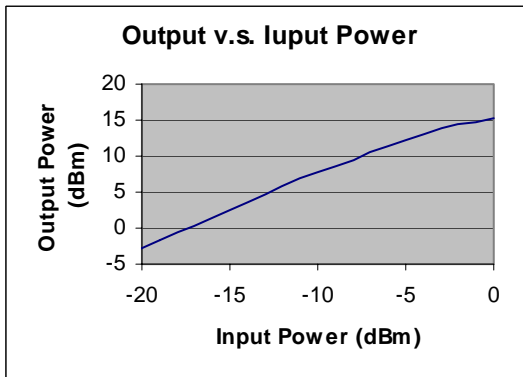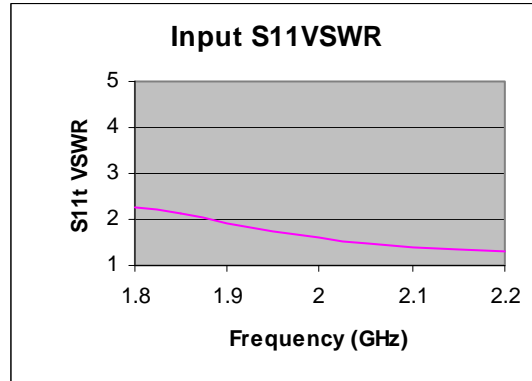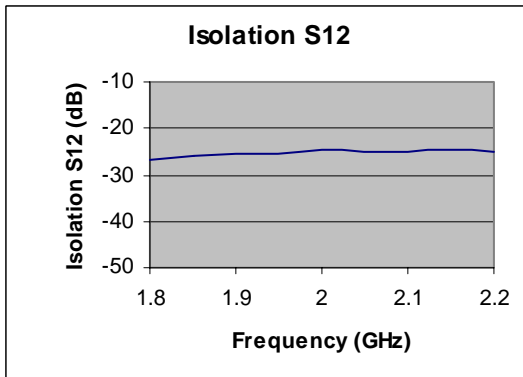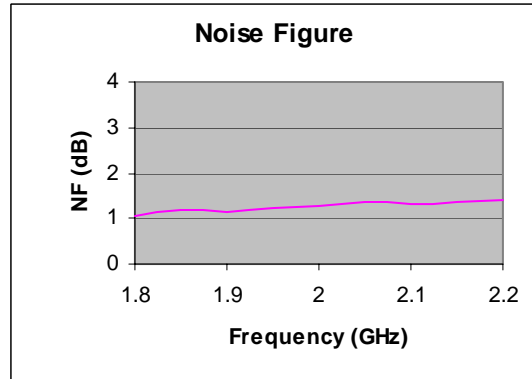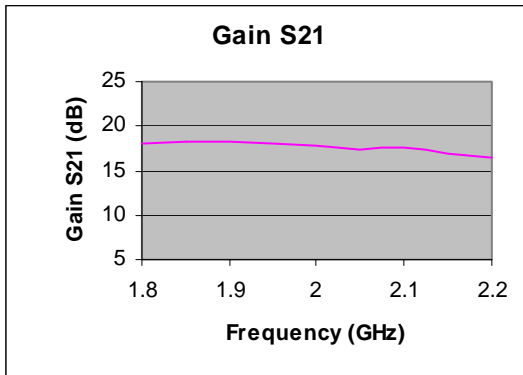

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### Outline

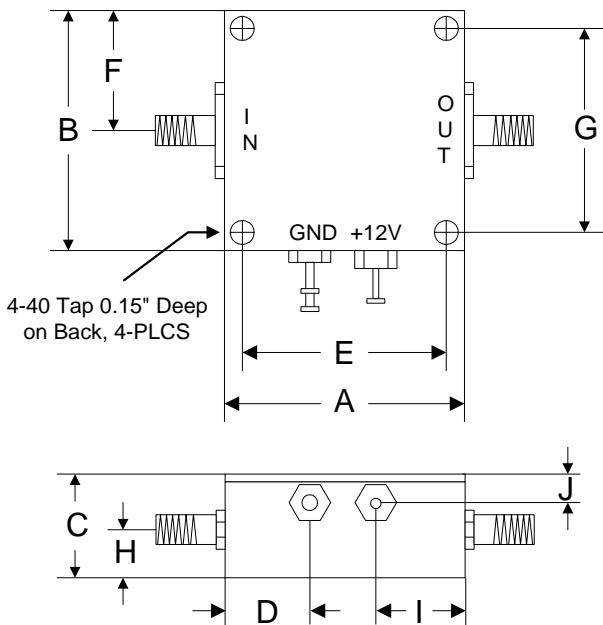

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76