


BNA Series

1575.42MHz L1 Band GPS Amplifier

Features

- Center Frequency:1575.42MHz
- Gain: 33dB
- Bandwidth: 40MHz
- P_{1dB}: +3dBm
- IP3: +15dBm
- Noise Figure: 1.1dB
- DC Power: 12V/10mA
- Internal Voltage Regulated
- Reverse DC Protection
- SMA Connector

Picture

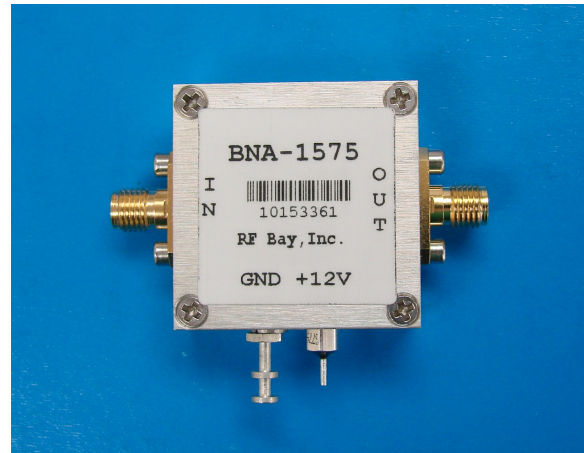

Performance measured @ 1575.42MHz







Description

BNA-1575 is Band Limited Low Noise Amplifier designed for L1 Band GPS receive application.

Electrical Specifications @ +25 °C, Z_{in} = Z_{out} = 50 Ω, V_{cc} = 12V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1555	1575.42	1595
Bandwidth	MHz		±20	
Gain	dB		33	
Gain Flatness	dB		± 0.5	± 1.0
P _{1dB}	dBm		+3	
IP3	dBm		+15	
Noise Figure	dB		1.1	1.3
Reverse Isolation	dB		-47	
VSWR Input VSWR			1.5:1	
Output VSWR			1.5:1	
DC Power Supply	V	5	12	15
Supply Current	mA		10	


Typical Performance @ +25 °C

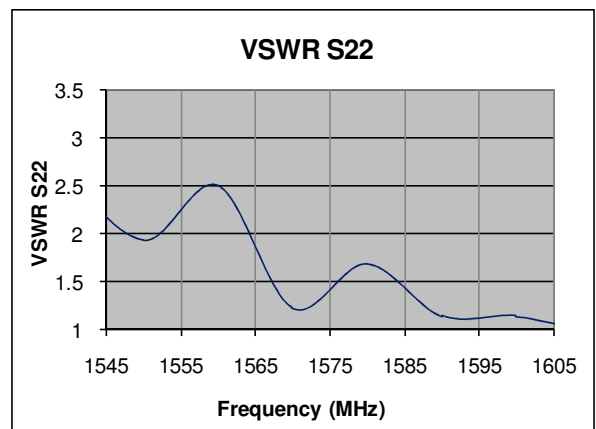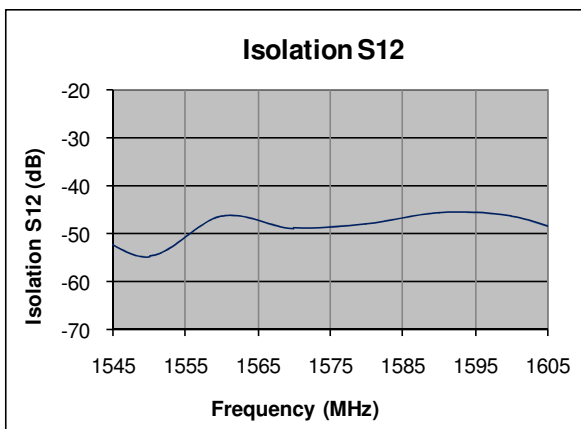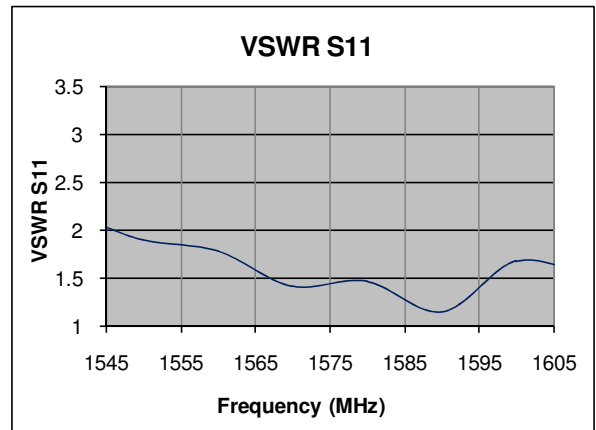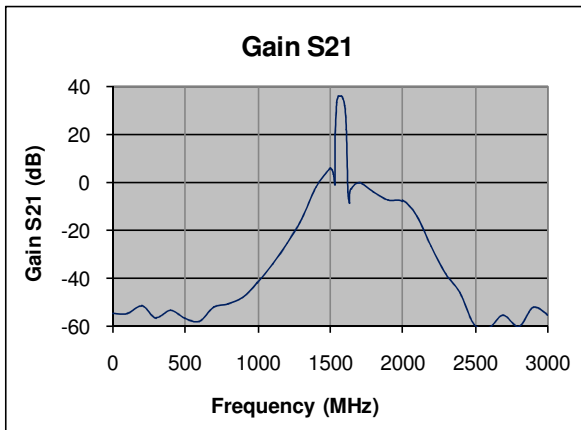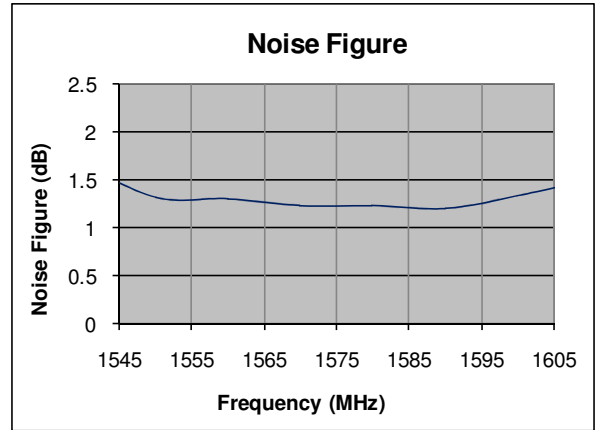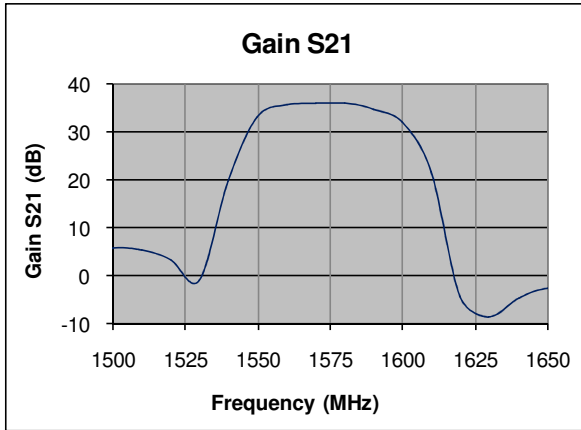

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+15dBm
Supply Voltage	+20V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

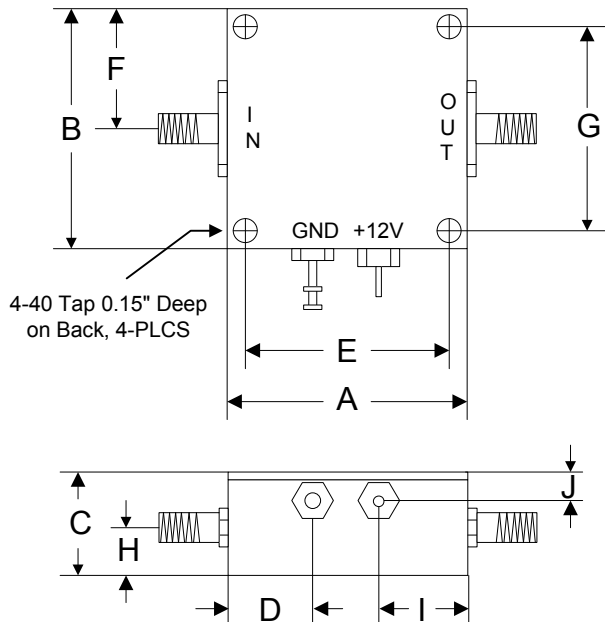

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76